WAAS CH 82510 W07A	APP CRS 065°	Rwy Ldg 4784 TDZE 319 Apt Elev 331

RNAV (GPS) RWY 7
WATERTOWN INTL (ART)


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV visibilities all Cats to 1⅜ SM and LNAV Cat C/D visibilities to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 900 then climbing left turn to 3500 direct NOYAQ and hold.

ASOS	KGTB ATIS	WHEELER-SACK APP CON	UNICOM
132.325	119.525	124.875 307.125	123.0 (CTAF) L

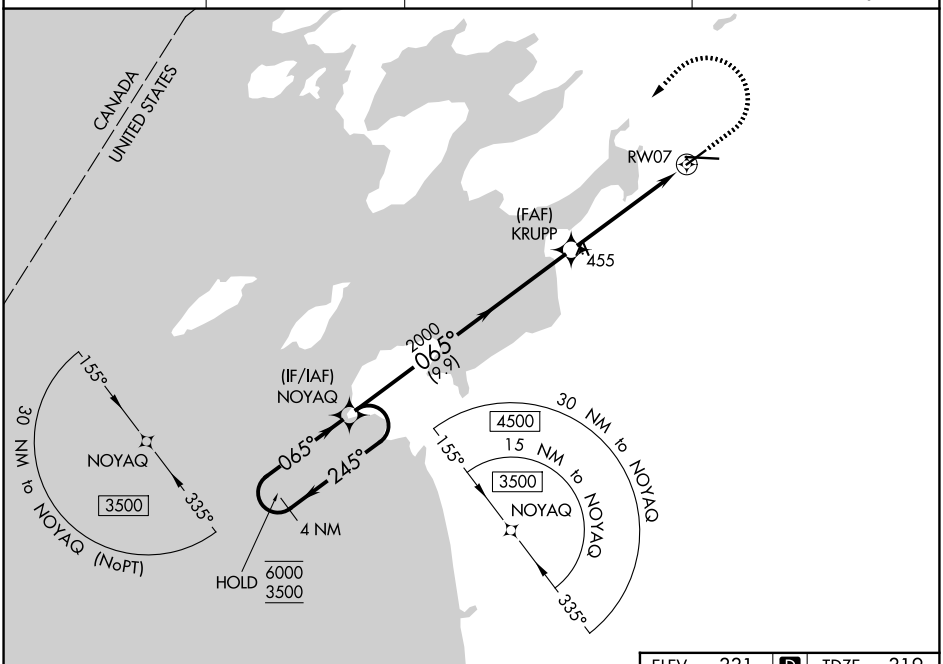

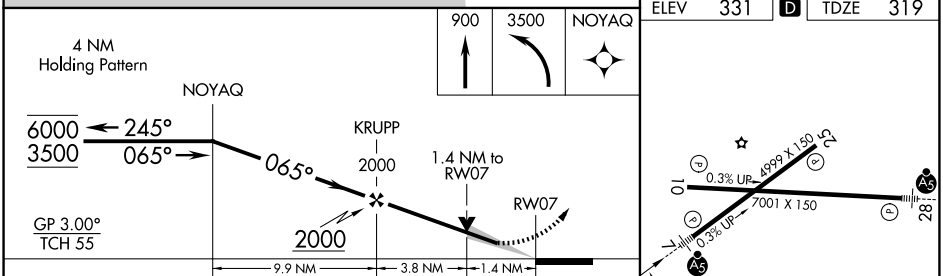

CATEGORY	A	B	C	D
LPV DA	519-½ 200 (200-½)			
LNAV/VNAV DA	800-1 481 (500-1)			
LNAV MDA	800-½ 481 (500-½)		800-1 481 (500-1)	
CIRCLING	960-1 629 (700-1)		980-1¾ 649 (700-1¾)	1080-2½ 749 (800-2½)

REIL Rwy 25 L
HIRL Rwy 7-25 L
MIRL Rwy 10-28 L

NE-2, 26 NOV 2026 to 24 DEC 2026