WAAS	APP CRS	Rwy Ldg	7008
CH 93716	224°	TDZE	6817
W22A		Apt Elev	6817


RNAV (GPS) RWY 22

RAWLINS MUNI/HARVEY FLD (RWL)

T A Baro-VNAV NA when using Saratoga altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C (-18°F) or above 44°C (111°F). Circling NA northwest of Rwy 4-22. DME/DME RNP-0.3 NA. VDP NA when using Saratoga altimeter setting. When local altimeter setting not received, use Saratoga altimeter setting and increase all DA 91 feet, and LPV visibility ⅜ mile, and LNAV/VNAV visibility 1 mile; increase all MDA 100 feet and LNAV visibility Cat B ¼ mile, Cats C and D ½ mile, Circling visibility Cats B and C ¼ mile. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 11700 direct EFWOV and on track 258° to CKW VOR/DME and hold, continue climb-in-hold to 11700.


ASOS	DENVER CENTER	UNICOM
118.525	132.1 254.35	123.0 (CTAF) L

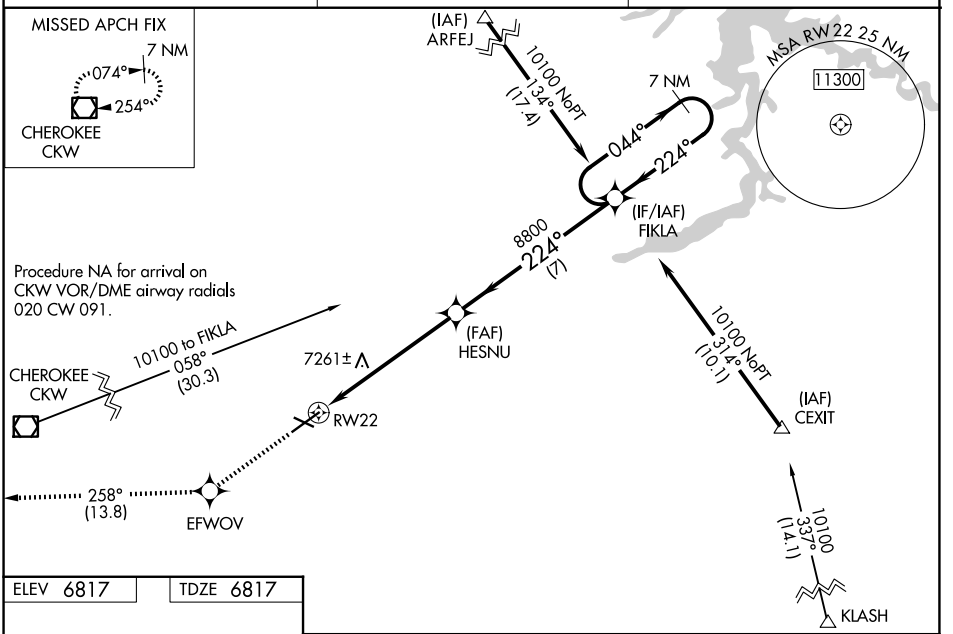

NW-1, 26 NOV 2026 to 24 DEC 2026

NW-1, 26 NOV 2026 to 24 DEC 2026


ELEV 6817 TDZE 6817



REIL Rwys 22 and 29 L
MIRL Rwys 4-22 and 11-29 L

11700	EFWOV	tr 258°	CKW

7 NM Holding Pattern

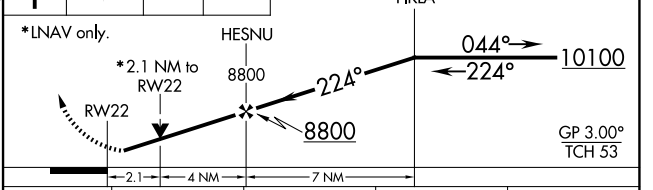

CATEGORY	A	B	C	D
LPV DA	7131-1	314 (400-1)		
LNAV/VNAV DA	7637-3	820 (900-3)		
LNAV MDA	7520-1	703 (800-1)	7520-2	703 (800-2)
CIRCLING	7520-1	703 (800-1)	7540-1	723 (800-1)	7660-2½	843 (900-2½)	7900-3	1083 (1100-3)