
FUNNL THREE DEPARTURE (RNAV)

(FUNNL3.FUNNL) 07DEC17


OKLAHOMA CITY, OKLAHOMA
WILEY POST (PWA)

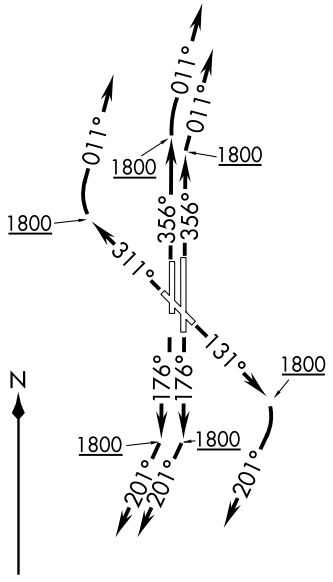

TOP ALTITUDE: Assigned by ATC

ATIS 128.725
GND CON 121.7
WILEY POST TOWER★ 126.9 306.9
OKE CITY DEP CON 124.6 266.8 (South) 124.2 336.4 (North)

TAKEOFF MINIMUMS:
Rwys 13, 17L/R, 31, 35L/R:
Standard with minimum climb of 500′ per NM to 2100.



NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: RNAV 1.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 13: Climb heading 131° to 1800, then right turn heading 201° or as assigned by ATC, expect RADAR vectors to VOWED. Thence. . . .
TAKEOFF RWYS 17L/R: Climb heading 176° to 1800, then right turn heading 201° or as assigned by ATC, expect RADAR vectors to VOWED. Thence. . . .
TAKEOFF RWY 31: Climb heading 311° to 1800, then right turn heading 011° or as assigned by ATC, expect RADAR vectors to VOWED. Thence. . . .
TAKEOFF RWY 35L: Climb heading 356° to 1800, then heading 011° or as assigned by ATC, expect RADAR vectors to VOWED. Thence. . . .
TAKEOFF RWY 35R: Climb heading 356° to 1800, then right turn heading 011° or as assigned by ATC, expect RADAR vectors to VOWED. Thence. . . .

. . . . on track 080° to FUNNL, then on (transition). Maintain 3000 or as assigned by ATC. Expect filed altitude 10 minutes after departure.

PHARA TRANSITION (FUNNL3.PHARA):

(FUNNL3.FUNNL) 17341

FUNNL THREE DEPARTURE (RNAV)

AL-739 (FAA)

WILEY POST (PWA)
OKLAHOMA CITY, OKLAHOMA