WAHIAWA, OAHU I, HAWAII

RNAV (GPS)-C

APCH CRS	Rwy Idg	N/A
352°	TDZE	N/A
	Arpt Elev	843

[USA]

WHEELER AAF (PHHI)

RNP APCH - GPS
DME required


*Circling to Rwy 24 not authorized at night.
Circling not authorized N Rwy 6-24 when class D surface area is VFR.

MISSED APPROACH: (Do not exceed 220 KIAS until initial turn completion.) Climbing right turn to 6000 direct HNL VORTAC, track 171° to ALANA and hold.


ATIS	HCF APP CON	TOWER ★	GND CON
119.675 242.4	118.3 269.0	126.3 (CTAF) 235.625	41.5 FM 121.85 237.5

Knots	60	120	180	240	300	360
V/V(fpm)	295	590	885	1180	1475	1770

Min climb of 295 ft/NM to 3000 - Controlling Obstacle 1611

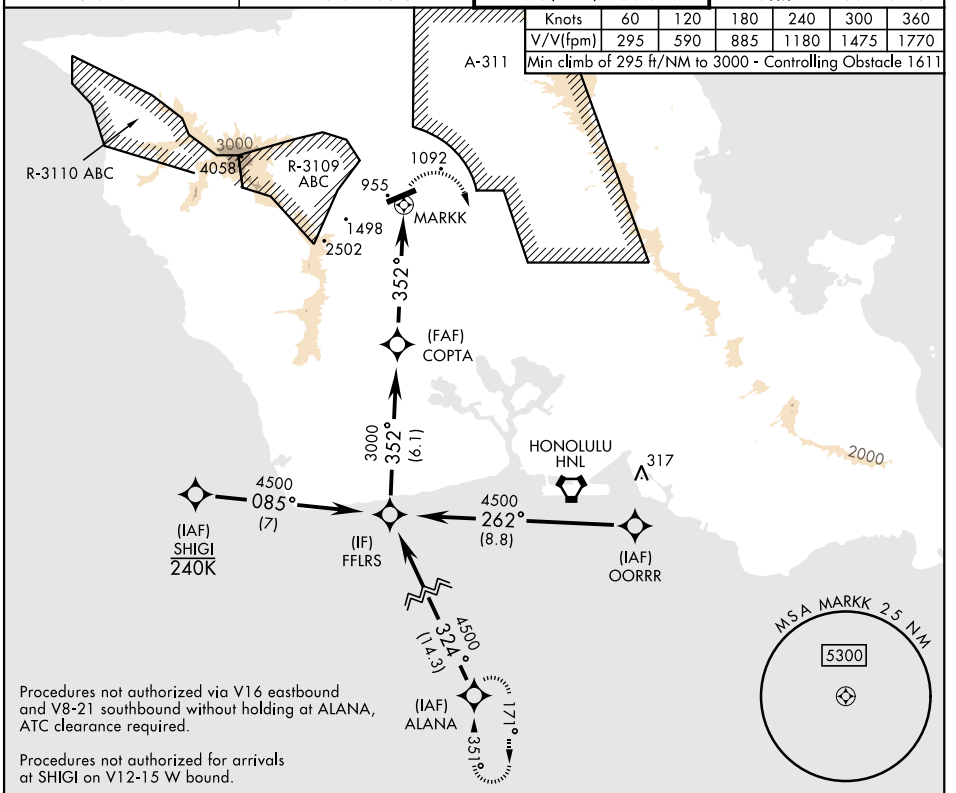


When local altimeter not received use HNL INTL altimeter setting and minimums.

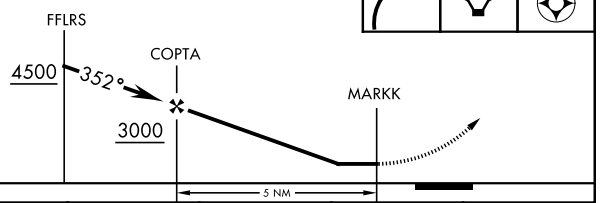

6000 | HNL | ALANA

ELEV 843



CATEGORY	A	B	C	D
CIRCLING *	1400-1 557 (600-1)	1800-1½ 957 (1000-1½)	2820-3 1977 (2000-3)	NOT AUTHORIZED
DANIEL K. INOUYE INTL ALTIMETER MINIMUMS				
CIRCLING*	1560-1 717 (800-1)	1960-1½ 1117 (1200-1½)	2980-3 2137 (2200-3)	NOT AUTHORIZED

352°

MIRL Rwy 6-24

PAC, 29 OCT 2026 to 24 DEC 2026
PAC, 29 OCT 2026 to 24 DEC 2026