WAHIAWA, OAHU I, HAWAII

VOR or TACAN-B

VORTAC HNL	APCH CRS	Rwy Idg	N/A
114.8	319°	TDZE	N/A
Chan 95		Arpt Elev	843

[USA] WHEELER AAF (PHHI)

DME required

T * Circling not authorized N Rwy 6-24 when class D surface area is VFR. Circling to Rwy 24 not authorized at night.


† MISSED APPROACH: Climb to 3000, then right turn via heading 180° and HNL VORTAC R-319 to cross TACHI INT/HNL 7 DME at 6000, then via HNL VORTAC R-319 to HNL VORTAC and hold.


ATIS	HCF APP CON	TOWER ★	GND CON
119.675 242.4	118.3 239.05	126.3(CTAF) 235.625	41.5 FM 121.85 237.5

Knots	60	120	180	240	300	360
V/V(fpm)	545	1090	1635	2180	2725	3270


Min climb of 545 ft/NM to 6000 - Controlling Obstacle 2704

† For TACAN equipped aircraft continue via HNL VORTAC R-171 to ALANA INT/HNL13.9 DME and hold. Hold S, RT, 351° inbound.

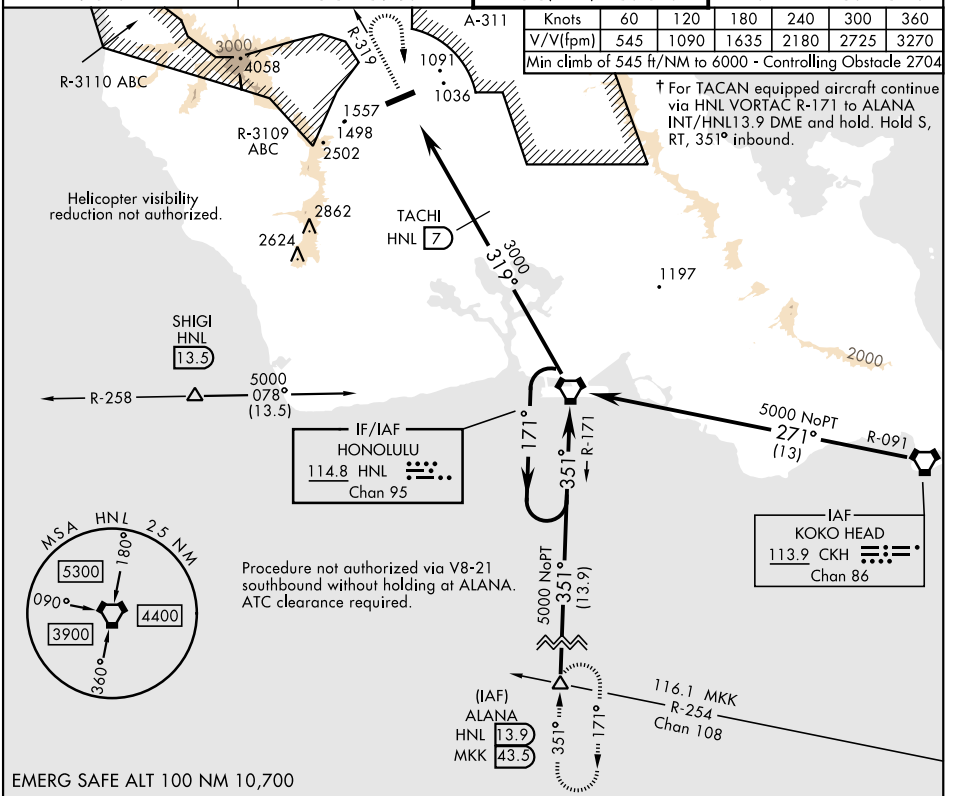

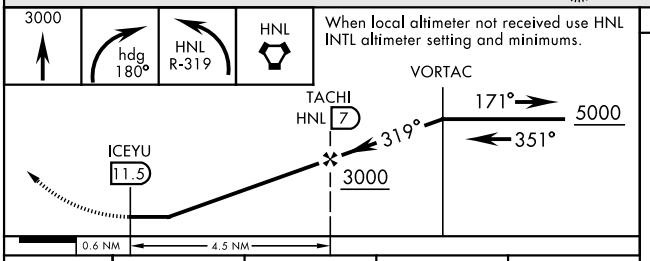

ELEV 843



CATEGORY	A	B	C	D
CIRCLING *	1400-1 557 (600-1)	1800-1½ 957 (1000-1½)	2820-3 1977 (2000-3)	NOT AUTHORIZED
DANIEL K. INOUYE INTL ALTIMETER MINIMUMS				
CIRCLING *	1560-1 717 (800-1)	1960-1½ 1117 (1200-1½)	2980-3 2137 (2200-3)	NOT AUTHORIZED

MIRL Rwy 6-24

WAHIAWA, OAHU I, HAWAII 21° 29'N - 158° 02'W WHEELER AAF (PHHI)

Amdt 4 07SEP23

VOR or TACAN-B

PAC, 29 OCT 2026 to 24 DEC 2026

PAC, 29 OCT 2026 to 24 DEC 2026