ILS Z or LOC Z RWY 2

KAHULUI (OGG)(PHOG)


LOC/DME I-OGG	APP CRS	Rwy Ldg	6995
110.1	024°	TDZE	55
Chan 38		Apt Elev	55

RNP APCH - GPS. From HOMAI or KEIKI or GREHG.
DME required.
For inop ALS, increase S-ILS 2 Cat E visibility to ¾ SM, and S-LOC 2 Cats C/D/E visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 3000 on OGG VORTAC R-023 to KRANE/OGG 13 DME and hold.

ATIS	HCF APPROACH	MAUI TOWER *	GND CON	UNICOM
128.6	120.2 322.4 (N) 119.5 225.4 (S)	118.7 (CTAF) L 279.6	121.9 279.6	122.95

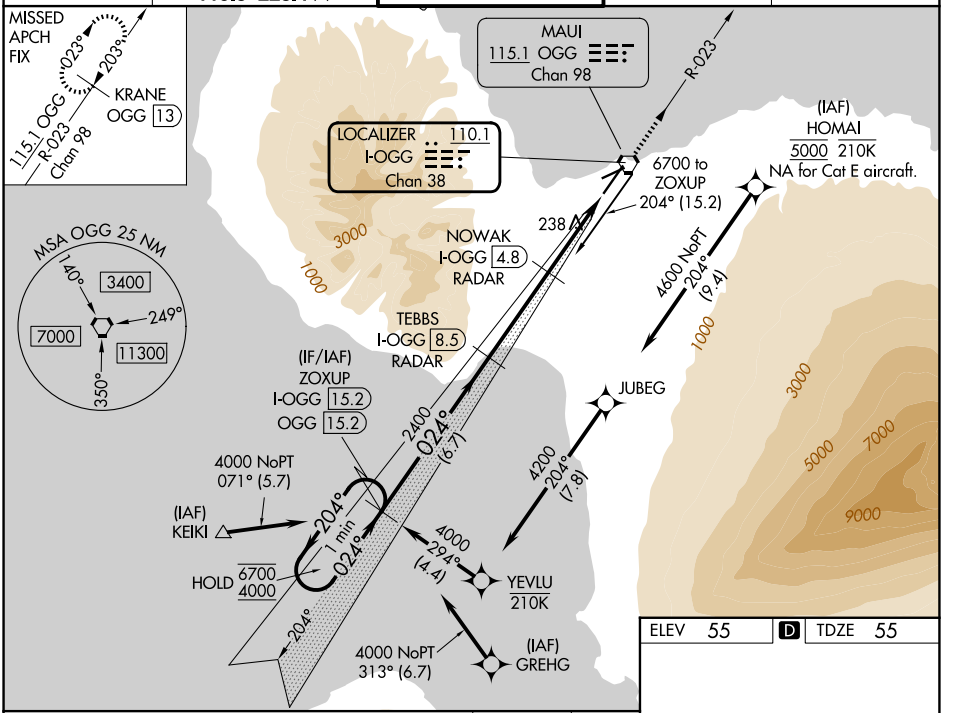

ELEV 55 D TDZE 55

Use I-OGG DME when on the localizer course.

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 77).

3000
OGG R-023

KRANE
OGG
13

One Minute Holding Pattern

ZOXUP
I-OGG 15.2
OGG 15.2

TEBBS
I-OGG 8.5
RADAR

NOWAK
I-OGG 4.8
RADAR

I-OGG 2.5

I-OGG 1.3

6700
4000
204°
024°


024°

2400

1220

GS 3.00°
TCH 62

6.7 NM | 3.7 NM | 2.3 NM | 1.2

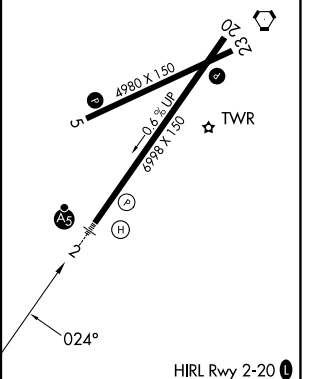

CATEGORY	A	B	C	D	E
S-ILS 2	275-½ 220 (300-½)				
S-LOC 2	520-½ 465 (500-½)		520-1 465 (500-1)		
CIRCLING	520-1 465 (500-1)	620-1 565 (600-1)	800-2¼ 745 (800-2¼)	1160-3 1105 (1200-3)	1720-3 1665 (1700-3)

HIRL Rwy 2-20 L
MIRL Rwy 5-23 L

PAC, 29 OCT 2026 to 24 DEC 2026
PAC, 29 OCT 2026 to 24 DEC 2026