RNAV (RNP) Z RWY 2

KAHULUI (OGG)(PHOG)

APP CRS	Rwy Ldg	6995
024°	TDZE	55
	Apt Elev	55


RNP AR APCH - GPS.


For uncompensated Baro-VNAV systems, procedure NA below 14°C or above 54° C. When local altimeter setting not received, procedure NA. For inop ALS, increase RNP 0.30 all Cats visibility to ⅞ SM.


MALSR

MISSED APPROACH: Climb to 3000 direct KRANE and hold.

ATIS	HCF APPROACH	MAUI TOWER ★	GND CON	UNICOM
128.6	120.2 322.4 (N) 119.5 225.4 (S)	118.7 (CTAF) L 279.6	121.9 279.6	122.95

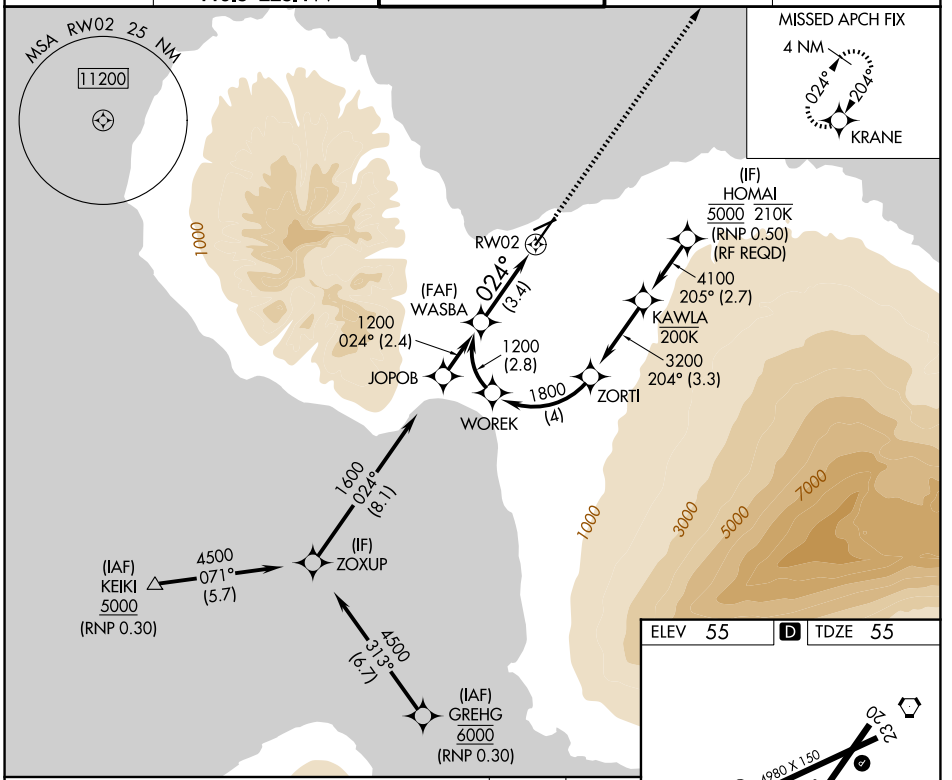

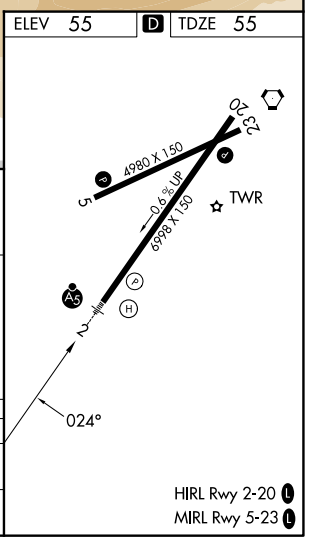

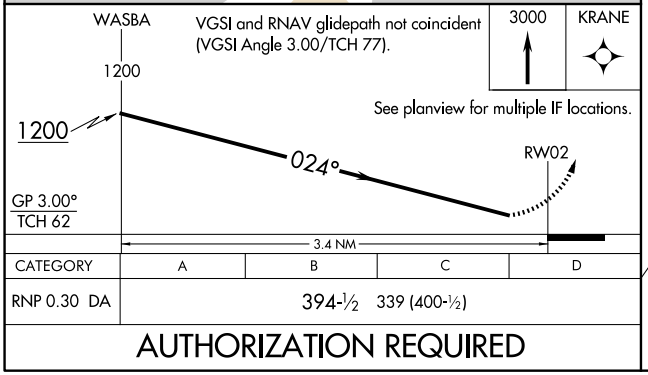

CATEGORY	A	B	C	D
RNP 0.30 DA	394-½	339 (400-½)		

AUTHORIZATION REQUIRED

PAC, 29 OCT 2026 to 24 DEC 2026
PAC, 29 OCT 2026 to 24 DEC 2026