RNAV (GPS) RWY 30

JEFFERSON CITY MEML (JEF)

WAAS CH 86410 W30A	APP CRS 304°	Rwy Ldg 6000 / TDZE 549 / Apt Elev 549


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling Rwy 9 NA at night. When local altimeter setting not received, use COU altimeter setting and increase LPV DA to 879 feet; increase LNAV/VNAV DA to 1402 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cats B/C/D ¼ SM, and Circling visibility Cats A/B/C ¼ SM. Baro-VNAV and VDP NA when using COU altimeter setting. For inop ALS increase LNAV/VNAV visibility all Cats to 2½ SM. For inop ALS when using COU altimeter setting, increase LPV visibility all Cats to 1 SM and increase LNAV visibility Cats C/D to 2½ SM.


MALSR

MISSED APPROACH: Climb to 3000 direct GIBSN and hold.


ASOS	MIZZU APP CON	JEFFERSON CITY TOWER ★	GND CON	UNICOM
133.625	124.375 353.925	125.6 (CTAF) L	121.7	122.95

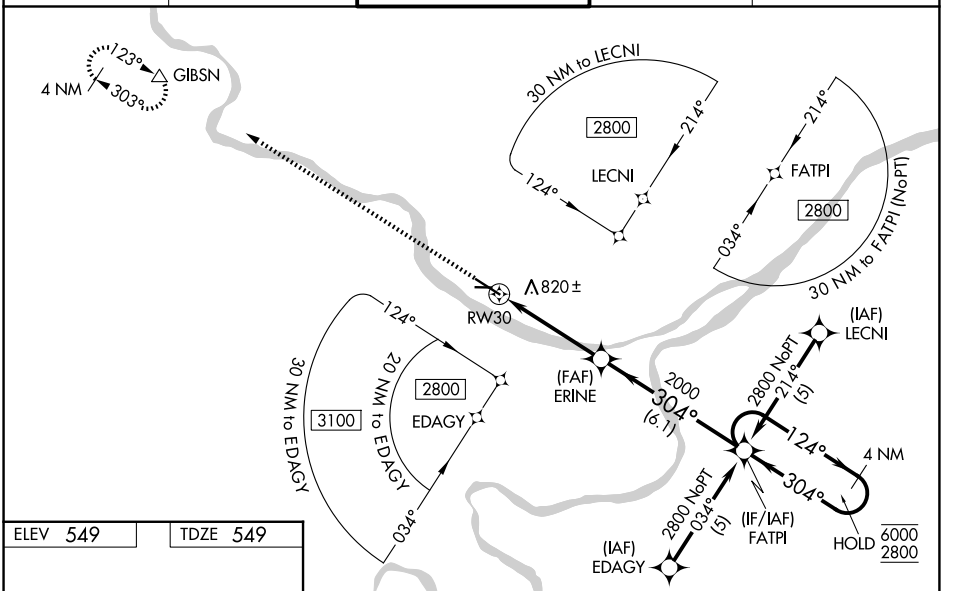

ELEV 549 TDZE 549



REIL Rwys 9, 12, and 27 L
MIRL Rwy 9-27
HIRL Rwy 12-30 L

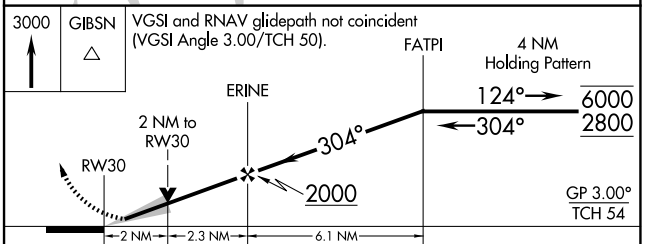

CATEGORY	A	B	C	D
LPV DA	799-½ 250 (300-½)			
LNAV/VNAV DA	1322-1¾ 773 (800-1¾)			
LNAV MDA	1240-½ 691 (700-½)		1240-1½ 691 (700-1½)	
CIRCLING	1280-1 731 (800-1)		1320-2¼ 771 (800-2¼)	1560-3 1011 (1100-3)

NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026