RNAV (GPS) RWY 16

DRAUGHON-MILLER CENTRAL TEXAS RGNL (TPL)

WAAS CH 78101 W16A	APP CRS 160°	Rwy Ldg 7000 / TDZE 682 / Apt Elev 682


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to ⅞ SM.


MALSR

MISSED APPROACH: Climb to 3600 direct FADXY and on track 074° to BARBA and hold, continue climb-in-hold to 3600.

AWOS-3PT	GRAY APP CON	CLNC DEL	UNICOM
134.975	120.075 370.0	125.9	123.0 (CTAF) L

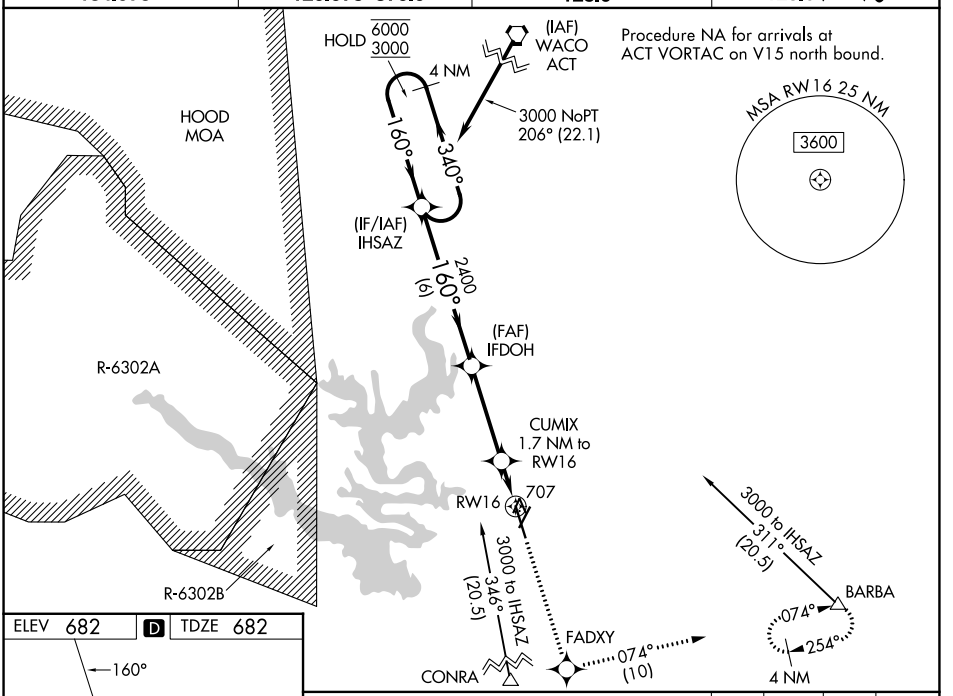

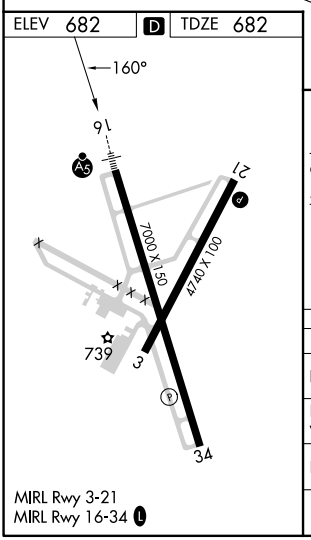

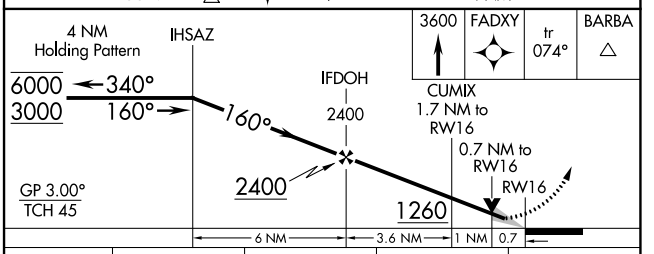

CATEGORY	A	B	C	D
LPV DA	882-½ 200 (200-½)			
LNAV/VNAV DA	932-½ 250 (300-½)			
LNAV MDA	960-½ 278 (300-½)			
CIRCLING	1140-1 458 (500-1)	1200-1 518 (600-1)	1280-1½ 598 (600-1½)	1420-2¼ 738 (800-2¼)

SC-3, 26 NOV 2026 to 24 DEC 2026
SC-3, 26 NOV 2026 to 24 DEC 2026