RNAV (GPS) Y RWY 23

WEST VIRGINIA INTL YEAGER (CRW)


WAAS	APP CRS	Rwy Ldg	6215
CH 45616	233°	TDZE	931
W23A		Apt Elev	947

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative ALSF, increase LNAV/VNAV all Cats visibility to 2¼. **RVR 1800 authorized with use of FD or AP or HUD to DA.

ALSF-1

MISSED APPROACH: Climb to 1400 then climbing right turn to 3000 direct HVQ VOR/DME and hold.


ATIS	CHARLESTON APP CON	CHARLESTON TOWER	GND CON
127.6	124.1 269.125	125.7 257.8	121.8 348.6

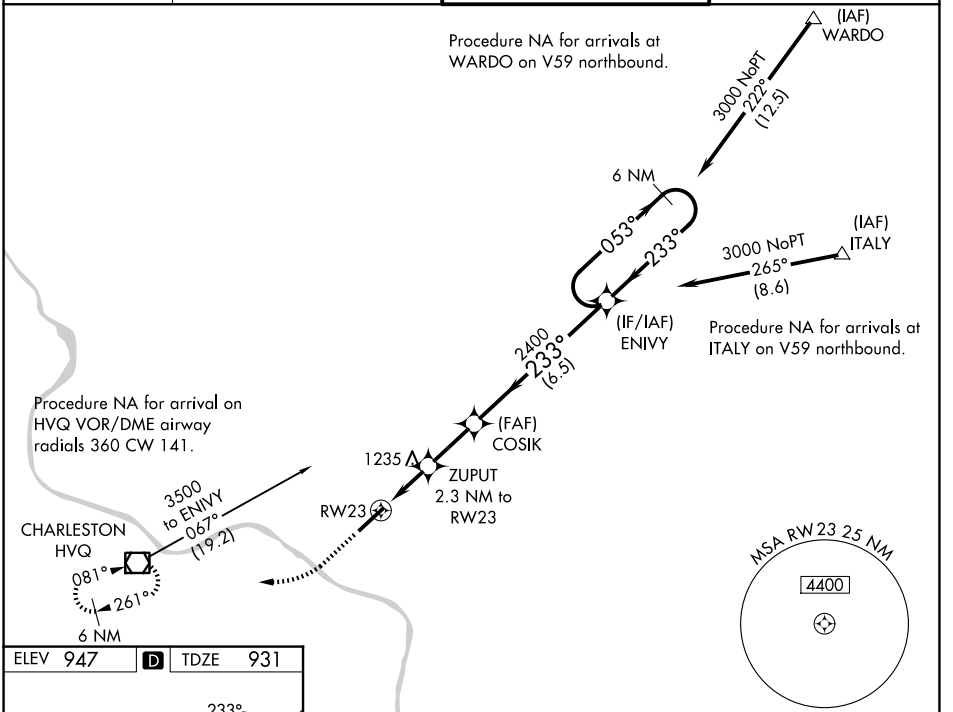


NE-4, 26 NOV 2026 to 24 DEC 2026

NE-4, 26 NOV 2026 to 24 DEC 2026

ELEV 947 D TDZE 931



HIRL Rwy 5-23
REIL Rwy 5

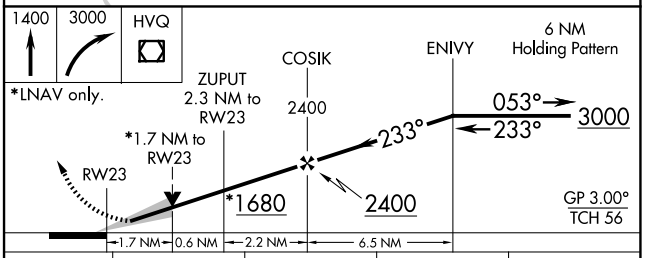

CATEGORY	A	B	C	D
LPV DA**	1131/24 200 (200-½)			
LNAV/VNAV DA	1601-1⅞ 670 (700-1⅞)			
LNAV MDA	1500/24 569 (600-½)		1500-1⅜ 569 (600-1⅜)	
CIRCLING	1600-1 653 (700-1)		1760-2½ 813 (900-2½)	1760-2¾ 813 (900-2¾)