RNAV (GPS) RWY 22

QUINCY RGNL-BALDWIN FLD (UIN)


WAAS	APP CRS		
CH **45705**	**218°**	Rwy Ldg	**7098**
W22A		TDZE	**753**
		Apt Elev	**768**


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. Baro-VNAV and VDP NA when using Pittsfield altimeter setting. When local altimeter setting not received, use Pittsfield altimeter setting and increase LPV DA to 1073 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 1120 feet and all visibilities ⅛ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ⅛ SM.

MISSED APPROACH: Climb to 1300 then climbing left turn to 2400 direct FANUT and hold.

ASOS	KANSAS CITY CENTER	UNICOM
121.425	**126.225 317.775**	**123.0** (CTAF) L

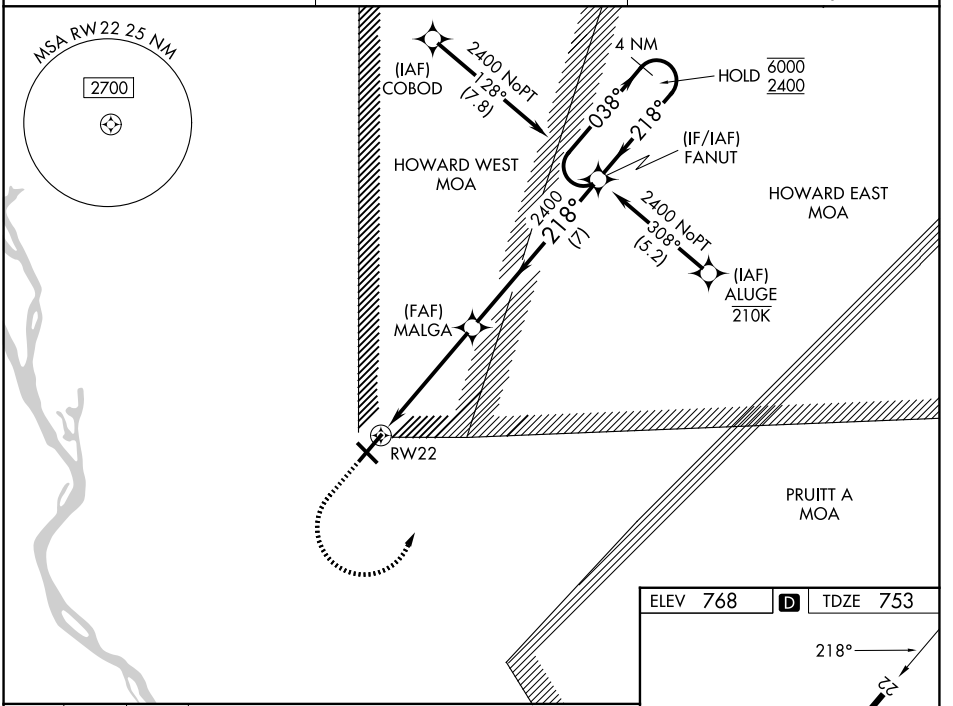

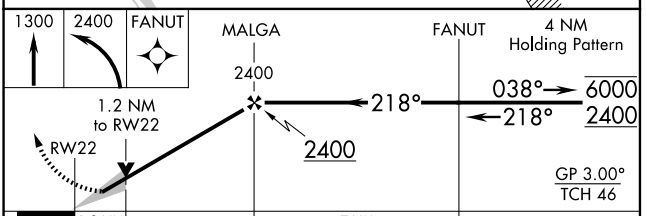

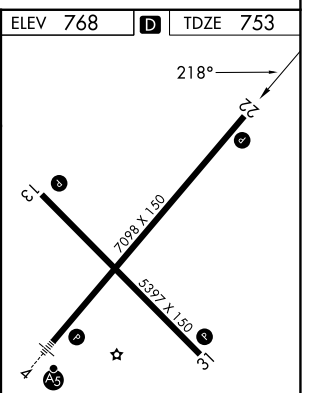

CATEGORY	A	B	C	D
LPV DA		1003-¾	250 (300-¾)	
LNAV/VNAV DA		1050-⅞	297 (300-⅞)	
LNAV MDA	1180-1	427 (500-1)	1180-1¼	427 (500-1¼)
CIRCLING	1180-1 412 (500-1)	1220-1 452 (500-1)	1240-1½ 472 (500-1½)	1320-2 552 (600-2)

EC-3, 26 NOV 2026 to 24 DEC 2026
EC-3, 26 NOV 2026 to 24 DEC 2026