ILS or LOC RWY 2

DILLANT/HOPKINS (EEN)

LOC I-EEN	APP CRS	Rwy Ldg	6201
108.9	018°	TDZE	488
		Apt Elev	488


DME required for LOC only.

T A -20°C Circling Rwy 32 NA at night. Rwy 2 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to S-ILS 2 all Cats, S-LOC 2 Cats C/D and CIMVI fix minimums S-LOC 2 Cat A. For inop ALS, increase S-LOC 2 Cat Avisibility to 1¼ SM and increase CIMVI fix minimums S-LOC 2 Cat B visibility to 1¼ SM and Cat C/D visibility to 2½ SM. When local altimeter setting not received, use ORE altimeter setting and increase S-ILS 2 DA to 914; increase all MDAs 60 feet and increase CIMVI fix minimums S-LOC 2 Cats C and D visibility ⅛ SM. Inop table does not apply to S-LOC 2 Cats C/D when using ORE altimeter setting. For inop ALS when using ORE altimeter setting, increase S-LOC 2 Cat A visibility to 1¼ SM and increase CIMVI fix minimums S-LOC 2 Cats A/B visibility to 1¼ SM. VDP NA when using ORE altimeter setting. DME from EEN DME. DME use requires simultaneous reception of I-EEN and EEN DME.


MALSR (A5)

MISSED APPROACH: Climb to 1540 then climbing left turn to 3100 on heading 200° and GDM VOR/DME R-323 to CAHOW INT/GDM VOR/DME 13 DME and hold.

AWOS-3PT	BOSTON CENTER	UNICOM
119.025	123.75 338.2	123.0 (CTAF) L

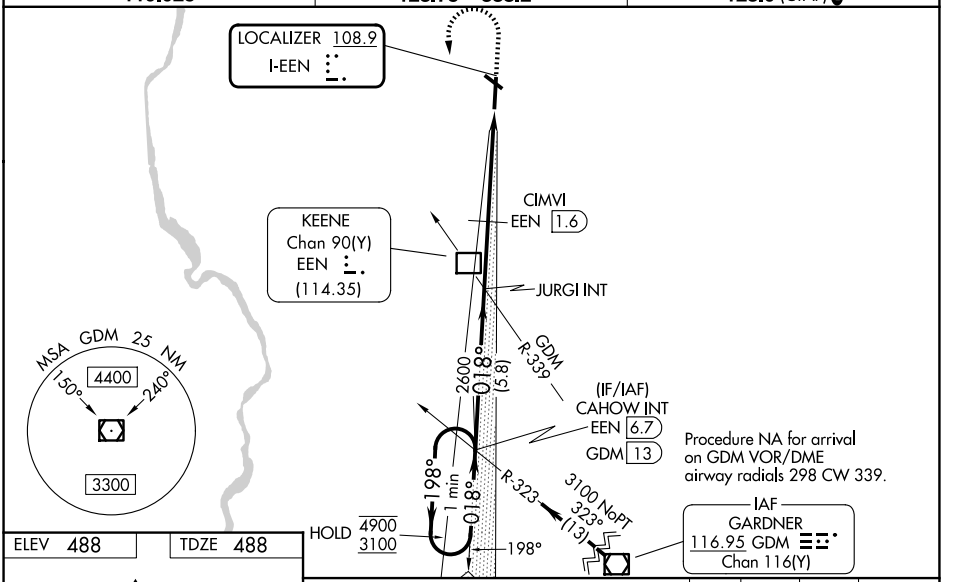


ELEV 488 TDZE 488

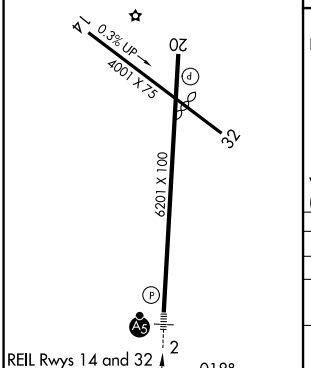

REIL Rwys 14 and 32
HIRL Rwy 2-20 L
MIRL Rwy 14-32 L

FAF to MAP 6.5 NM

Knots	60	90	120	150	180
Min:Sec	6:30	4:20	3:15	2:36	2:10

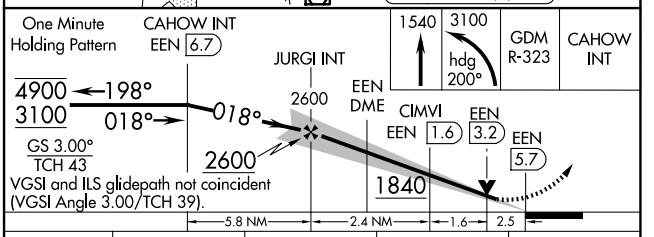

CATEGORY	A	B	C	D
S-ILS 02	860-1 372 (400-1)			
S-LOC 02	1840-1 1352 (1400-1)		1840-3 1352 (1400-3)	
CIRCLING	1840-1¼ 1352 (1400-1¼)	1840-1½ 1352 (1400-1½)	1840-3 1352 (1400-3)	1980-3 1492 (1500-3)
CIMVI FIX MINIMUMS (DME REQUIRED)				
S-LOC 02	1320-1 832 (900-1)		1320-1⅞ 832 (900-1⅞)	
CIRCLING	1420-1¼ 932 (1000-1¼)	1480-1½ 992 (1000-1½)	1760-3 1272 (1300-3)	1980-3 1492 (1500-3)

NE-1, 26 NOV 2026 to 24 DEC 2026