RNAV (GPS) RWY 10

MILLVILLE MUNI (MIV)

WAAS	APP CRS	Rwy Idg	6003
CH 53723	101°	TDZE	74
W10A		Apt Elev	85


RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Atlantic City altimeter setting: increase LPV DA to 330 feet; LNAV/VNAV DA to 571 feet and visibility ¼ SM; increase all MDAs 60 feet and visibility Cat C and D ¼ SM. Baro-VNAV and VDP NA when using Atlantic City altimeter setting. For inop MALSR when using Atlantic City altimeter setting, increase LNAV/VNAV all Cat visibility to 1⅝.


MALSR (A5)

MISSED APPROACH: Climb to 2000 direct ZIMDO and on track 128° to AZXEW and hold.


ASOS	ATLANTIC CITY APP CON	UNICOM
119.6	124.6 327.125	123.0 (CTAF) L

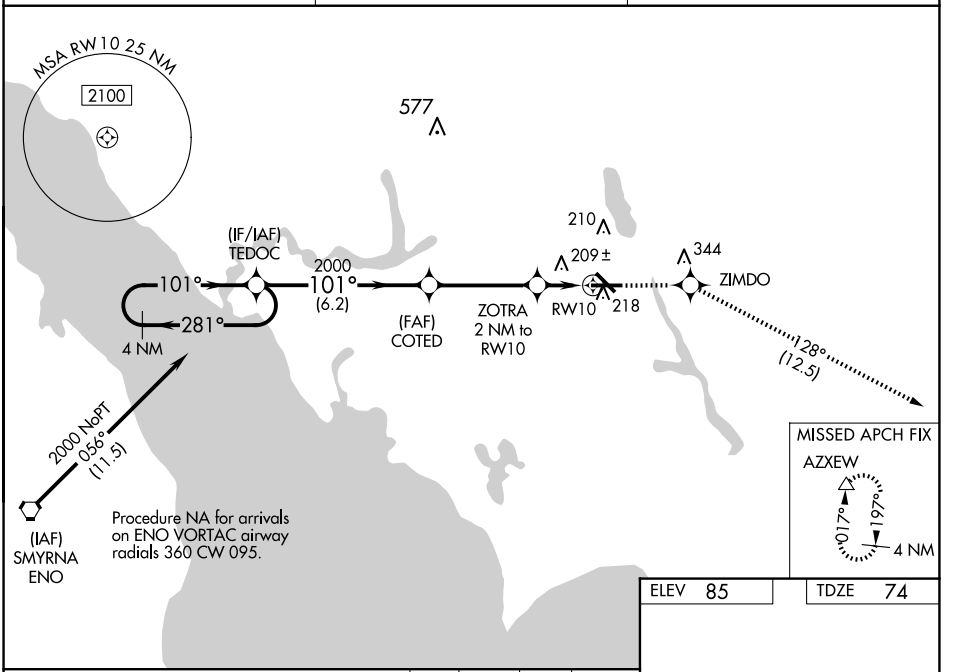

ELEV	85	TDZE	74

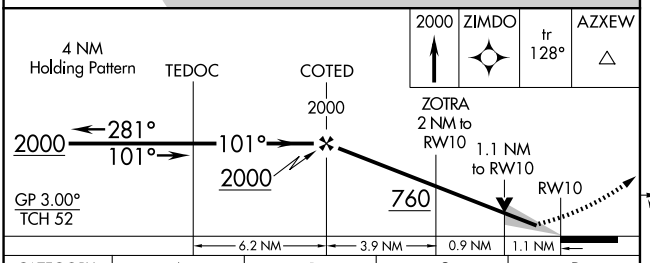

CATEGORY	A	B	C	D
LPV DA	274-½	200 (200-½)		
LNAV/VNAV DA	515-1	441 (500-1)		
LNAV MDA	460-½	386 (400-½)	460-⅝	386 (400-⅝)
CIRCLING	520-1 435 (500-1)	580-1 495 (500-1)	660-1½ 575 (600-1½)	660-2 575 (600-2)



MIRL Rwys 10-28 and 14-32 L

NE-2, 26 NOV 2026 to 24 DEC 2026
NE-2, 26 NOV 2026 to 24 DEC 2026