ILS or LOC RWY 36

VALDOSTA RGNL (VLD)


LOC I-VLD	APP CRS	Rwy Ldg	8002
110.9	356°	TDZE	200
		Apt Elev	203


Rwy 36 helicopter visibility reduction below ¾ SM NA. DME from OTK VOR/DME. DME use requires simultaneous reception of I-VLD and OTK DME. For inop ALS, increase S-ILS 36 all Cats visibility to ⅞ SM, increase S-LOC 36 Cats A and B visibility to 1 SM and Cat E visibility to 1¼ SM.


MALSR

MISSED APPROACH: Climb to 1200 then climbing left turn to 2000 on heading 231° and GEF R-051 to GEF VORTAC and hold.

ASOS	VALDOSTA APP CON ★	VALDOSTA TOWER ★	GND CON	UNICOM
126.225	126.6 285.6	128.35 (CTAF) L	121.7	122.95

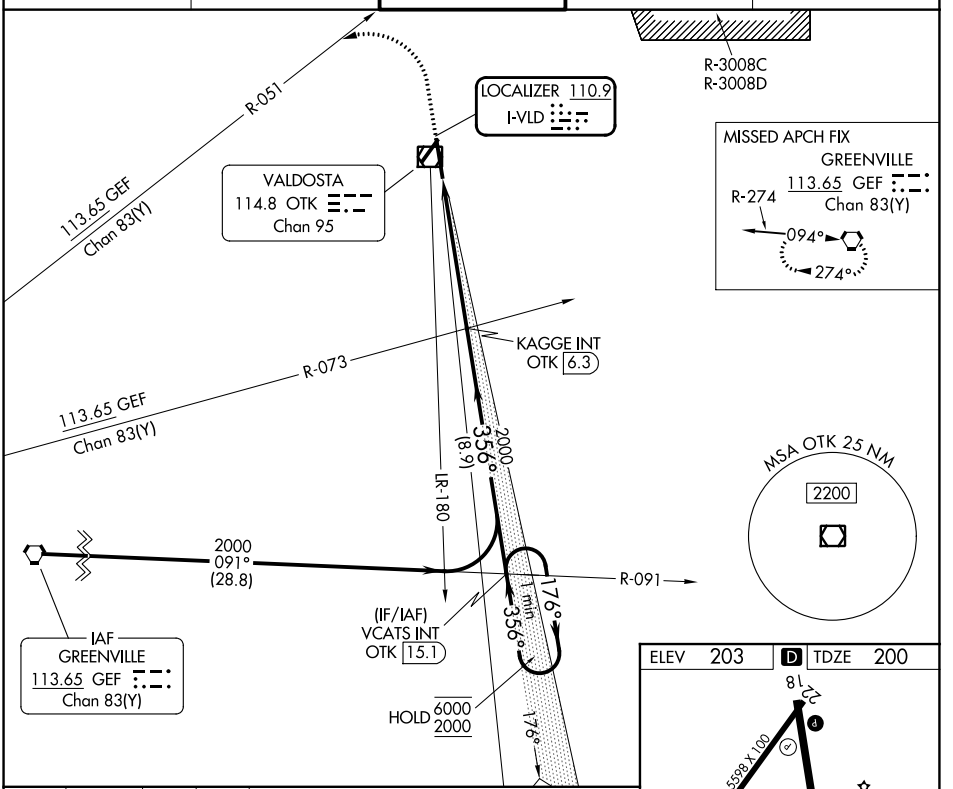

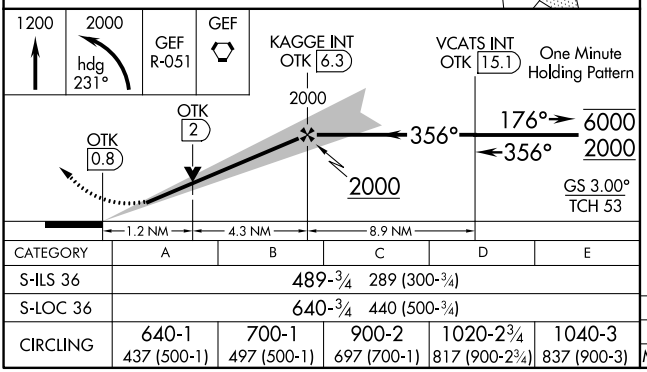

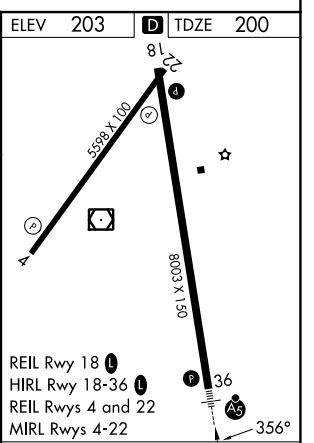

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

CATEGORY	A	B	C	D	E
S-ILS 36	489-¾ 289 (300-¾)				
S-LOC 36	640-¾ 440 (500-¾)				
CIRCLING	640-1 437 (500-1)	700-1 497 (500-1)	900-2 697 (700-1)	1020-2¾ 817 (900-2¾)	1040-3 837 (900-3)

SE-4, 26 NOV 2026 to 24 DEC 2026
SE-4, 26 NOV 2026 to 24 DEC 2026