LOC/DME I-GAD	APP CRS	Rwy Ldg	6804
108.35	244°	TDZE	560
Chan 20 (Y)		Apt Elev	569


ILS or LOC RWY 24

NORTHEAST ALABAMA RGNL (GAD)


DME required. VDP NA when using Anniston altimeter setting. When local altimeter setting not received, use Anniston altimeter setting and increase DA to 845 feet and all visibilities ¼ SM: increase all MDAs 80 feet and visibility S-LOC Cats C and D ¼ SM and Circling Cat C ½ SM.


MISSED APPROACH: Climb to 3600 on GAD VOR/DME R-231 to STAMP/GAD 10 DME and hold, continue climb-in-hold to 3600.

AWOS-3PT	BIRMINGHAM APP CON	UNICOM
127.825	125.45 279.65	122.725 (CTAF) L

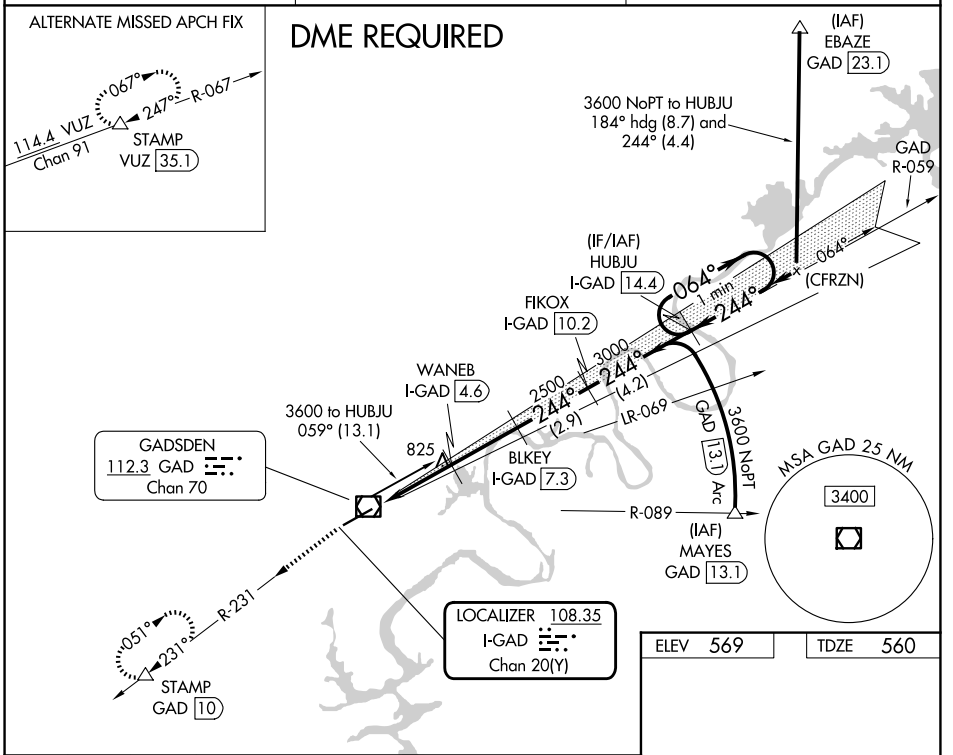

ELEV	569	TDZE	560

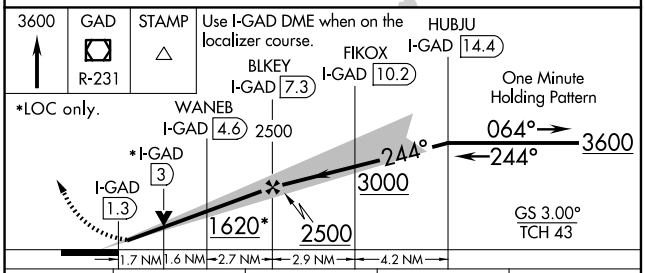



CATEGORY	A	B	C	D
S-ILS 24	779-¾ 219 (300-¾)			
S-LOC 24	1140-1 580 (600-1)		1140-1¾ 580 (600-1¾)	
CIRCLING	1140-1 571 (600-1)		1440-2½ 871 (900-2½)	1680-3 1111 (1200-3)

HIRL Rwy 6-24 L
REIL Rwys 6 and 24 L

SE-4, 26 NOV 2026 to 24 DEC 2026