RNAV (GPS) RWY 6

NORTHEAST ALABAMA RGNL (GAD)


WAAS CH 65706 W06A	APP CRS 064°	Rwy Ldg 6804 / TDZE 569 / Apt Elev 569

RNP APCH-GPS.

T A Baro-VNAV and VDP NA when using Anniston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter not received, use Anniston altimeter setting and increase LPV DA to 835, LNAV/VNAV DA to 1040 and all MDA 80 feet; increase LPV all Cats visibility ⅛ SM, LNAV/VNAV all Cats ¼ SM and increase LNAV Cats C/D and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 1300 then climbing left turn to 3500 direct SNEAR and hold.

AWOS-3PT	BIRMINGHAM APP CON	UNICOM
127.825	125.45 279.65	122.725 (CTAF) L

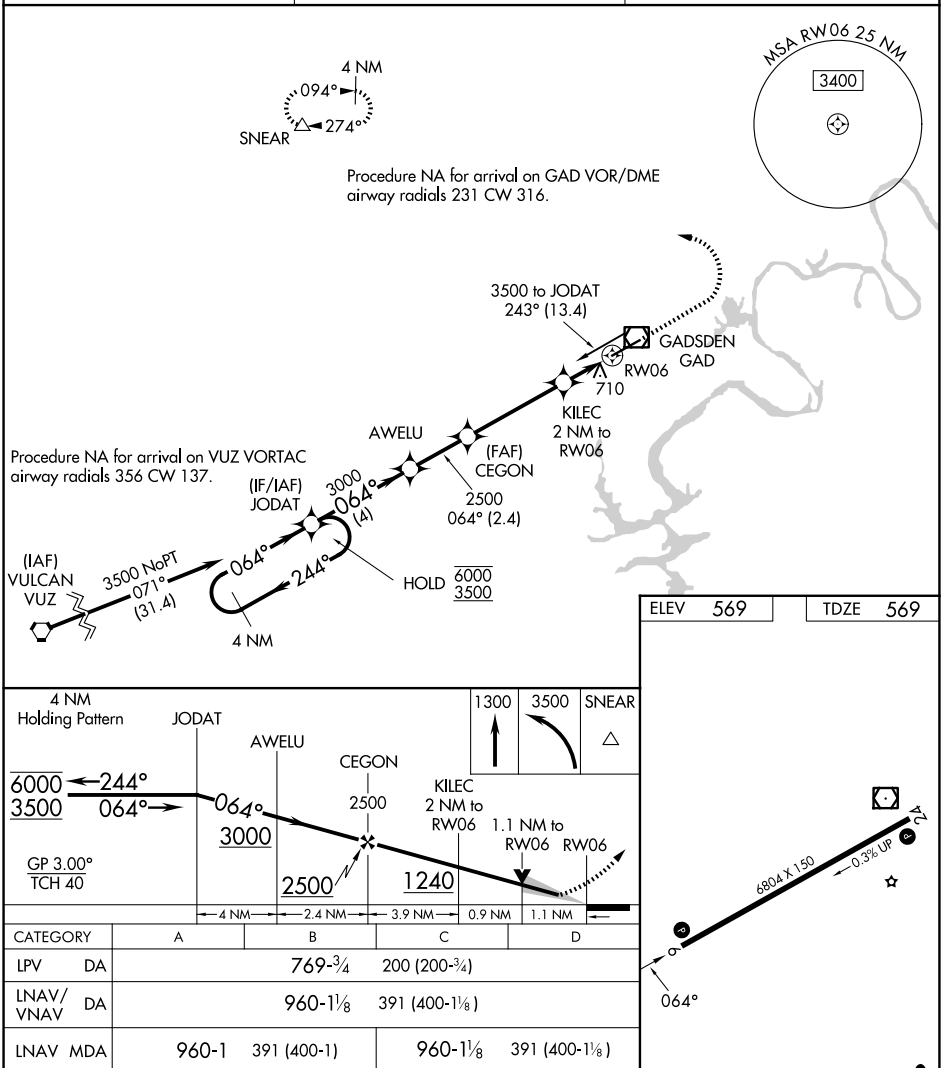

CATEGORY	A	B	C	D
LPV DA		769-¾	200 (200-¾)	
LNAV/VNAV DA		960-1⅛	391 (400-1⅛)	
LNAV MDA	960-1	391 (400-1)	960-1⅛	391 (400-1⅛)
CIRCLING	1100-1	531 (600-1)	1440-2½ 871 (900-2½)	1680-3 1111 (1200-3)

HIRL Rwy 6-24 L
REIL Rwys 6 and 24 L

SE-4, 26 NOV 2026 to 24 DEC 2026