RNAV (GPS) RWY 17

HOBART RGNL (HBR)


WAAS	APP CRS	Rwy Ldg	5507
CH 99417	173°	TDZE	1553
W17A		Apt Elev	1563


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using AXS altimeter setting. When local altimeter setting not received, use AXS altimeter setting and increase LPV DA to 1874 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 1971 feet and all visibilities ⅛ SM; increase all MDAs 80 feet and LNAV visibility Cat C and D ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 4000 direct DOMLE and hold.

ASOS	ALTUS APP CON ★	UNICOM
133.325	125.1 353.7	122.8 (CTAF)

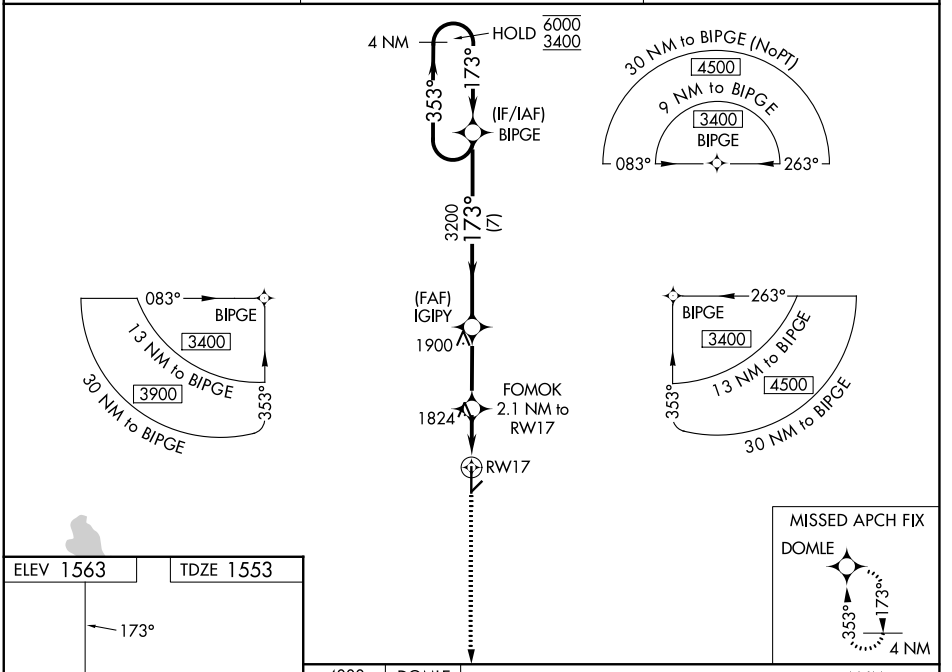

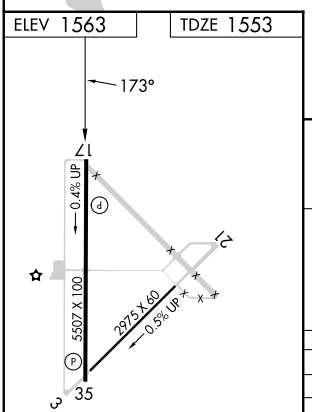

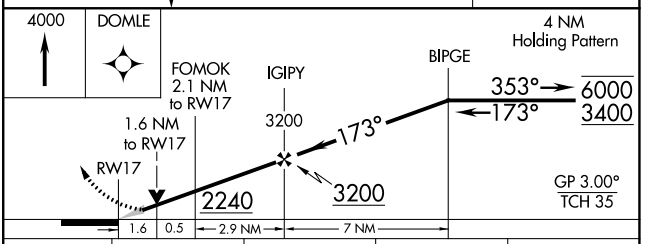

CATEGORY	A	B	C	D
LPV DA	1803-1 250 (300-1)			
LNAV/VNAV DA	1900-1¼ 347 (400-1¼)			
LNAV MDA	2080-1 527 (600-1)		2080-1½ 527 (600-1½)	2080-1¾ 527 (600-1¾)
CIRCLING	2080-1 517 (600-1)		2320-2¼ 757 (800-2¼)	2460-3 897 (900-3)

MIRL Rwy 17-35

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026