RNAV (GPS) RWY 35

HOBART RGNL (HBR)


WAAS	APP CRS	Rwy Ldg	5507
CH 53417	353°	TDZE	1561
W35A		Apt Elev	1563


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using AXS altimeter setting. When local altimeter setting not received, use AXS altimeter setting and increase LPV DA to 1882 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 2020 feet and all visibilities ¼ SM; increase all MDAs 80 feet and LNAV Cats C and D visibility ⅜ SM and Circling Cat C visibility ¼ SM.


MISSED APPROACH: Climb to 3400 direct BIPGE and hold.

ASOS	ALTUS APP CON ★	UNICOM
133.325	125.1 353.7	122.8 (CTAF)

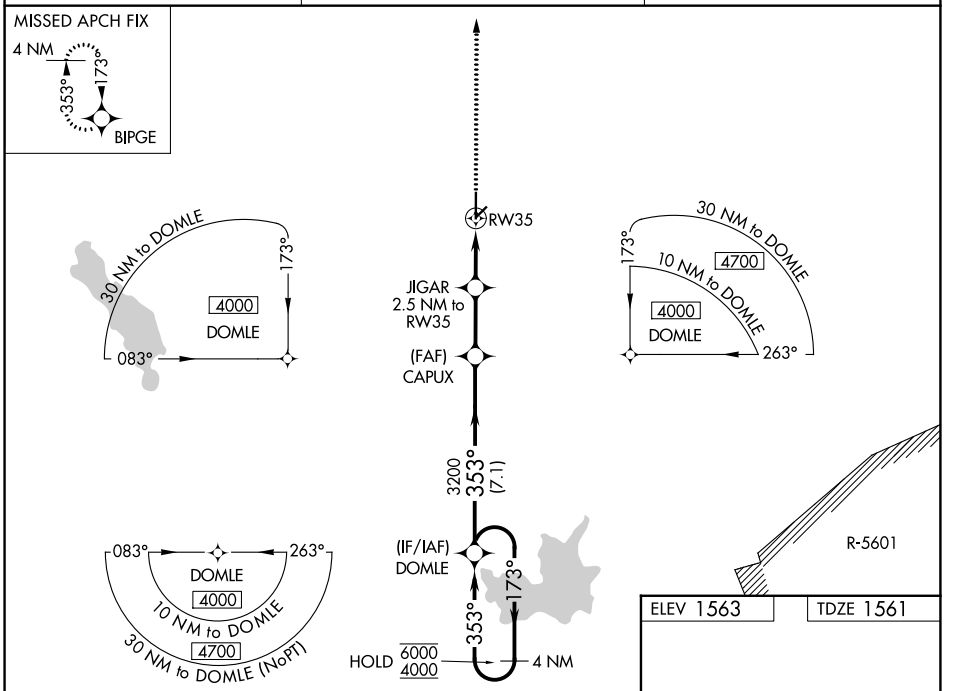

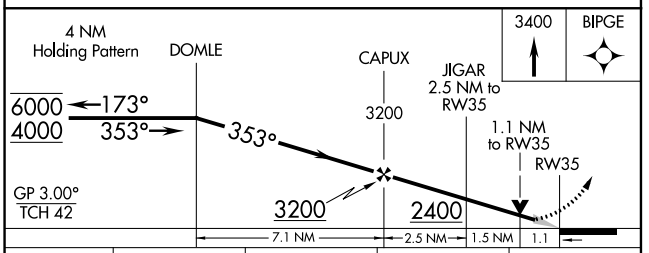

CATEGORY	A	B	C	D
LPV DA	1811-1 250 (300-1)			
LNAV/VNAV DA	1949-1¼ 388 (400-1¼)			
LNAV MDA	1940-1 379 (400-1)		1940-1½ 379 (400-1½)	1940-2 379 (400-2)
CIRCLING	1980-1 417 (500-1)	2020-1 457 (500-1)	2320-2¼ 757 (800-2¼)	2460-3 897 (900-3)

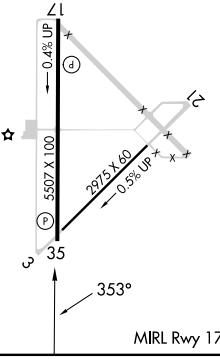

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026