
VORTAC HBR	APP CRS	Rwy Ldg	5507
115.85	354°	TDZE	1561
Chan 105(Y)		Apt Elev	1563

VOR RWY 35
HOBART RGNL (HBR)


When local altimeter setting not received, use AXS altimeter setting and increase all MDAs 80 feet, increase S-35 visibility Cats C and D ¼ SM. Increase FAPRA fix minimums S-35 Cats C and D and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 2100 then climbing right turn to 3800 direct HBR VORTAC and hold, continue climb-in-hold to 3800.

ASOS	ALTUS APP CON *	UNICOM
133.325	125.1 353.7	122.8 (CTAF)

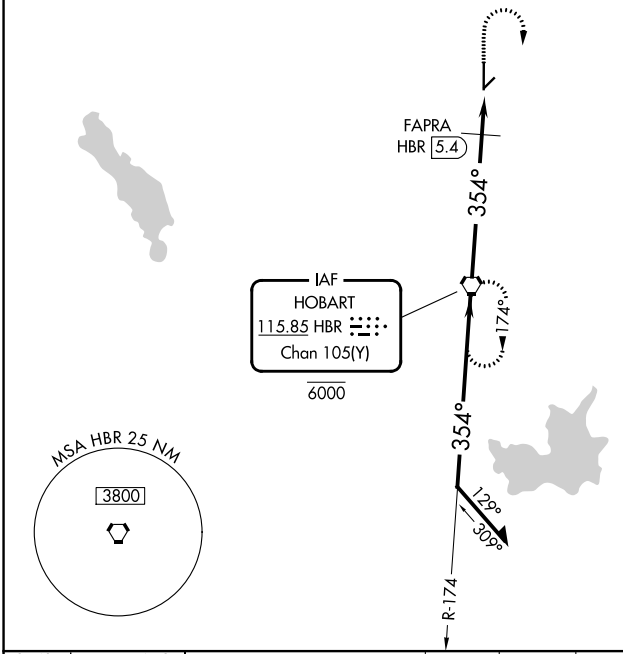


*2140 when using AXS altimeter setting.

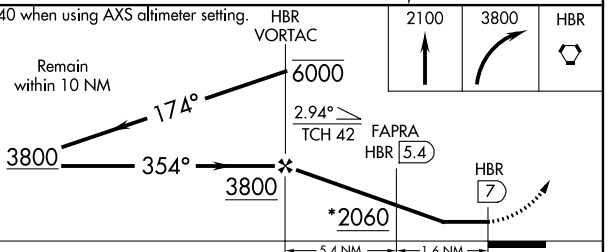

2100	3800	HBR

CATEGORY	A	B	C	D
S-35 *	2060-1	499 (500-1)	2060-1¼ 499 (500-1¼)	2060-1½ 499 (500-1½)
CIRCLING	2060-1	497 (500-1)	2320-2¼ 757 (800-2¼)	2460-3 897 (900-3)
FAPRA FIX MINIMUMS				
S-35	1980-1	419 (500-1)	1980-1¼	419 (500-1¼)
CIRCLING	1980-1 417 (500-1)	2020-1 457 (500-1)	2320-2¼ 757 (800-2¼)	2460-3 897 (900-3)

ELEV 1563 TDZE 1561

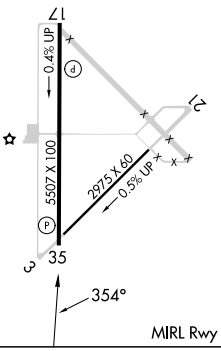

FAF to MAP 7 NM

Knots	60	90	120	150	180
Min:Sec	7:00	4:40	3:30	2:48	2:20

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026