VOR RWY 31

DUBUQUE RGNL (DBQ)

VORTAC DBQ	APP CRS	Rwy Ldg	6502
115.8	304°	TDZE	1062
Chan 105		Apt Elev	1077


T A

VOR minimums: For inop ALS, increase S-31 Cats C and D visibility to 2 SM.
ZUKOB fix minimums: For inop ALS, increase S-31 Cats C and D visibility to 1⅜ SM.


MALSR

MISSED APPROACH: Climbing right turn to 3500 on DBQ VORTAC R-322 to CASSY INT/ 25 DME and hold.


ATIS	CHICAGO CENTER	DUBUQUE TOWER ★	GND CON	UNICOM
127.25	133.95 281.4	119.5 (CTAF) L 254.6	121.8	122.95

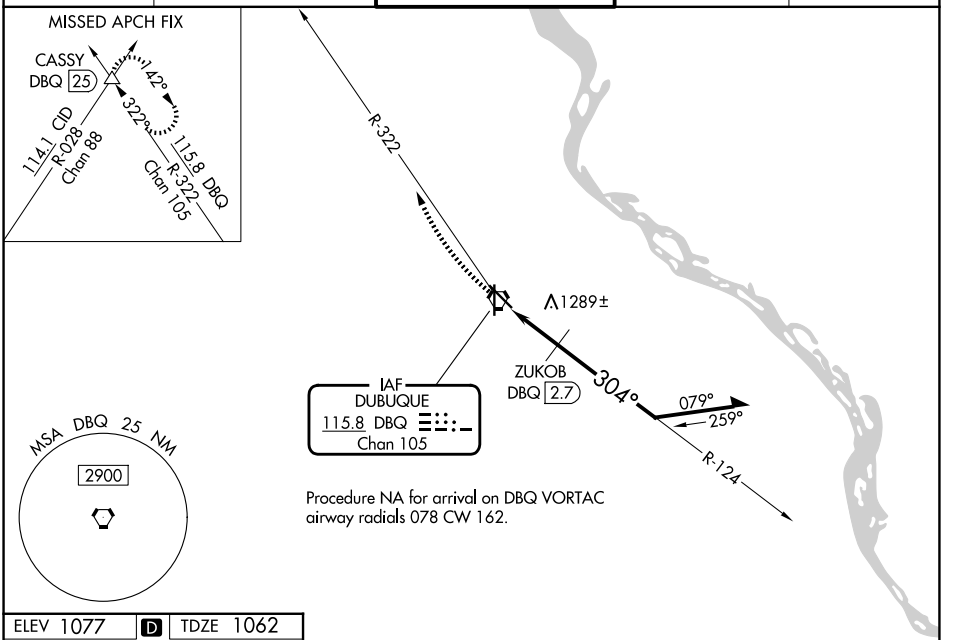

ELEV 1077 D TDZE 1062

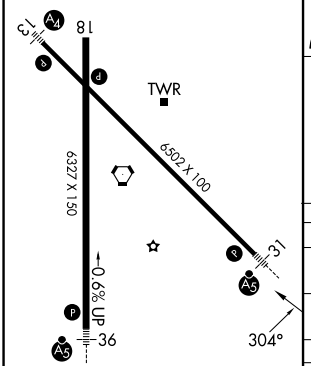

REIL Rwy 18 L
HIRL Rwys 13-31 and 18-36 L

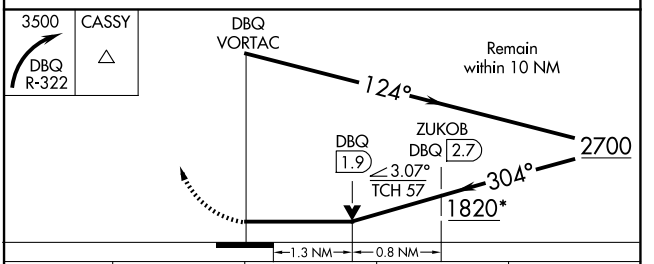

CATEGORY	A	B	C	D
S-31	1820-½ 758 (800-½)	1820-¾ 758 (800-¾)	1820-1¾ 758 (800-1¾)	
CIRCLING	1820-1 743 (800-1)	1820-1¼ 743 (800-1¼)	1820-2¼ 743 (800-2¼)	1820-2½ 743 (800-2½)
ZUKOB FIX MINIMUMS				
S-31	1540-½ 478 (500-½)		1540-1 478 (500-1)	
CIRCLING	1580-1 503 (600-1)	1600-1 523 (600-1)	1600-1½ 523 (600-1½)	1800-2 723 (800-2)

NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026