RNAV (GPS) RWY 35

LAWTON-FORT SILL RGNL (LAW)

WAAS	APP CRS		
CH 77640 W35A	351°	Rwy Ldg	8599
		TDZE	1089
		Apt Elev	1110

RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM.


ASR

MALSR

MISSED APPROACH: (Do not exceed 200K until WEGTE) Climb to 1520 then climbing left turn to 2700 direct WEGTE and hold.


ATIS	FORT SILL APP CON	LAWTON TOWER ★	GND CON	UNICOM
120.75	120.55 322.4	127.05 (CTAF) L 257.8	121.9	122.95

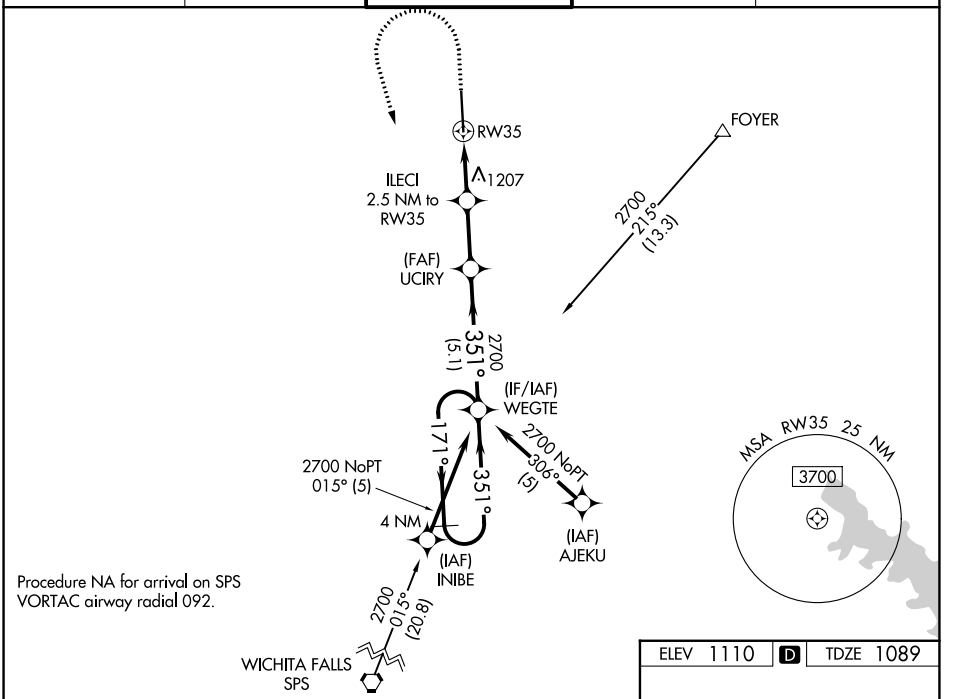

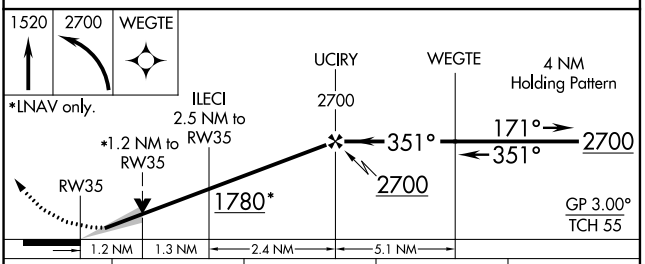

CATEGORY	A	B	C	D
LPV DA	1289-½	200 (200-½)		
LNAV/VNAV DA	1376-½	287 (300-½)		
LNAV MDA	1520-½ 431 (500-½)		1520-¾ 431 (500-¾)	
CIRCLING	1620-1 510 (600-1)		1820-2 710 (800-2)	1820-2¼ 710 (800-2¼)

ELEV 1110 D TDZE 1089

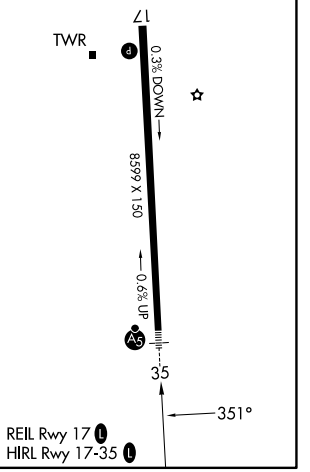

SC-1, 26 NOV 2026 to 24 DEC 2026
SC-1, 26 NOV 2026 to 24 DEC 2026