RNAV (GPS) RWY 7

NEWPORT NEWS/WILLIAMSBURG INTL (PHF)

WAAS CH 45607 W07A	APP CRS 067°	Rwy Ldg 8003 TDZE 40 Apt Elev 42


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Baro-VNAV and VDP NA when using ORF altimeter setting. When local altimeter setting not received, use ORF altimeter setting and increase LPV DA to 317 feet; increase LNAV/VNAV DA to 548 feet and visibility to RVR 5500 all Cats; increase all MDAs 80 feet and LNAV visibility Cat C/D to RVR 5500; increase Circling visibility Cat C ¼ SM and Cat D ½ SM.

MALSR


MISSED APPROACH: Climb to 2500 direct RIPPS and hold, continue climb-in-hold to 2500.

ATIS	NORFOLK APP CON	NEWPORT NEWS TOWER★	GND CON	UNICOM
128.65	125.7 335.625	118.7 (CTAF) L 257.9 348.6	121.9 348.6	122.95

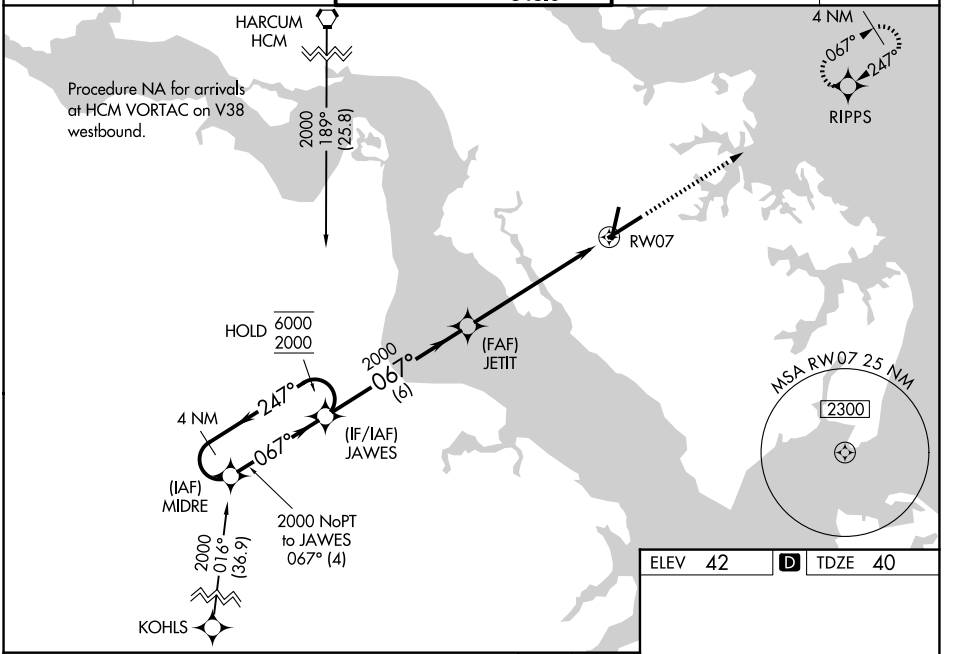

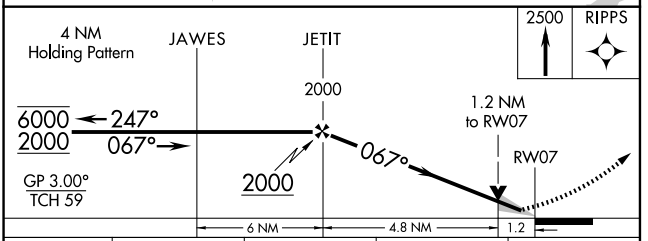

CATEGORY	A	B	C	D
LPV DA	243/24	203 (300-½)		
LNAV/VNAV DA	474/40	434 (500-¾)		
LNAV MDA	480/24	440 (500-½)	480/40	440 (500-¾)
CIRCLING	520-1 478 (500-1)	540-1 498 (500-1)	760-2 718 (800-2)	780-2¼ 738 (800-2¼)

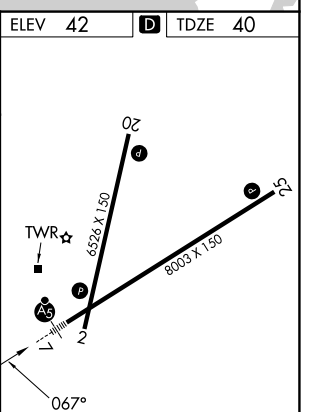

REIL Rwys 20 and 25 L
HIRL Rwys 2-20 and 7-25 L

NE-3, 26 NOV 2026 to 24 DEC 2026
NE-3, 26 NOV 2026 to 24 DEC 2026