RNAV (GPS) RWY 8

KEOKUK MUNI (EOK)


WAAS CH 97304 W08A	APP CRS 084°	Rwy Ldg 5500 / TDZE 672 / Apt Elev 672


RNP APCH - GPS.

Circling to Rwy 32 NA at night. Baro-VNAV and VDP NA when using Burlington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Burlington altimeter setting: increase LPV DA to 978 feet; LNAV/VNAV DA to 1116; increase all MDAs 60 feet and visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 2700 direct ZAKMI and hold.


AWOS-3	KANSAS CITY CENTER	UNICOM
118.375	126.225 317.775	122.8 (CTAF) L

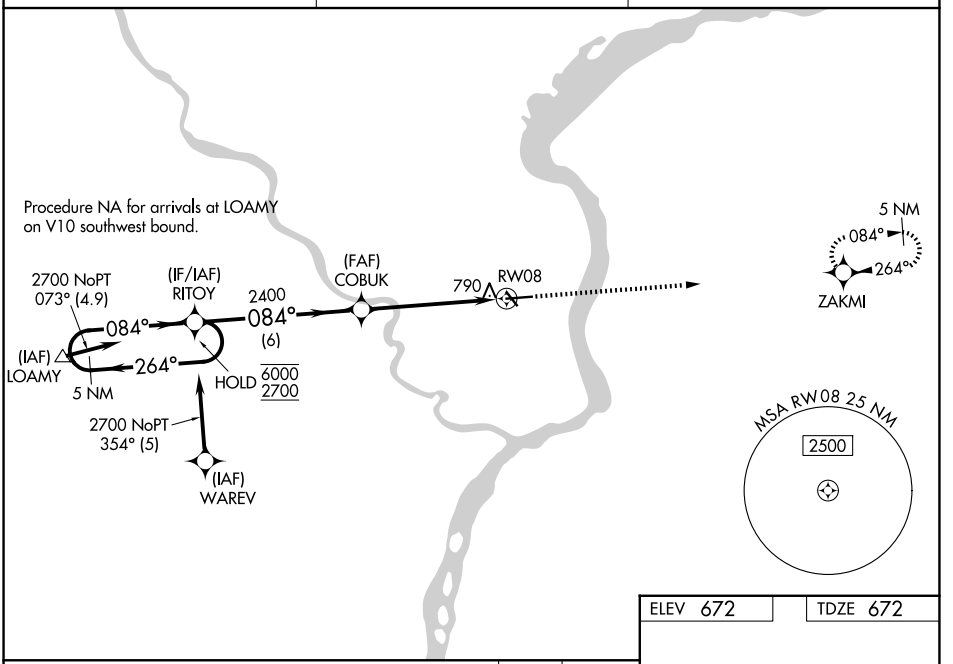

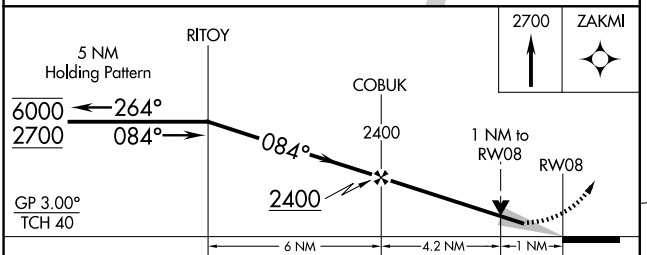

CATEGORY	A	B	C	D
LPV DA	922-1 250 (300-1)			NA
LNAV/VNAV DA	1060-1½ 388 (400-1½)			NA
LNAV MDA	1040-1 368 (400-1)			NA
CIRCLING	1180-1 508 (600-1)	1220-1 548 (600-1)	1220-1½ 548 (600-1½)	NA

ELEV 672 TDZE 672



REIL Rwys 8, 14, and 32 L

MIRL Rwys 8-26 and 14-32 L

NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026