WAAS CH **82615** **W30A** | APP CRS **305°** | Rwy Ldg **5301** TDZE **1142** Apt Elev **1156**

RNAV (GPS) RWY 30


FORT DODGE RGNL (FOD)

RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Helicopter visibility reduction below ¾ SM NA. VDP and Baro-VNAV NA when using Webster City altimeter setting. When local altimeter setting not received, use Webster City altimeter setting: increase LPV DA to 1466 feet and all Cats visibility ¼ SM; increase LNAV/VNAV DA to 1516 feet; increase all MDA 60 feet and LNAV Cats C/D and Circling Cat C visibility ¼ SM.


MISSED APPROACH: Climb to 3400 direct CUVPO and hold.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
118.775	**134.0 288.3**	**123.0** (CTAF) L

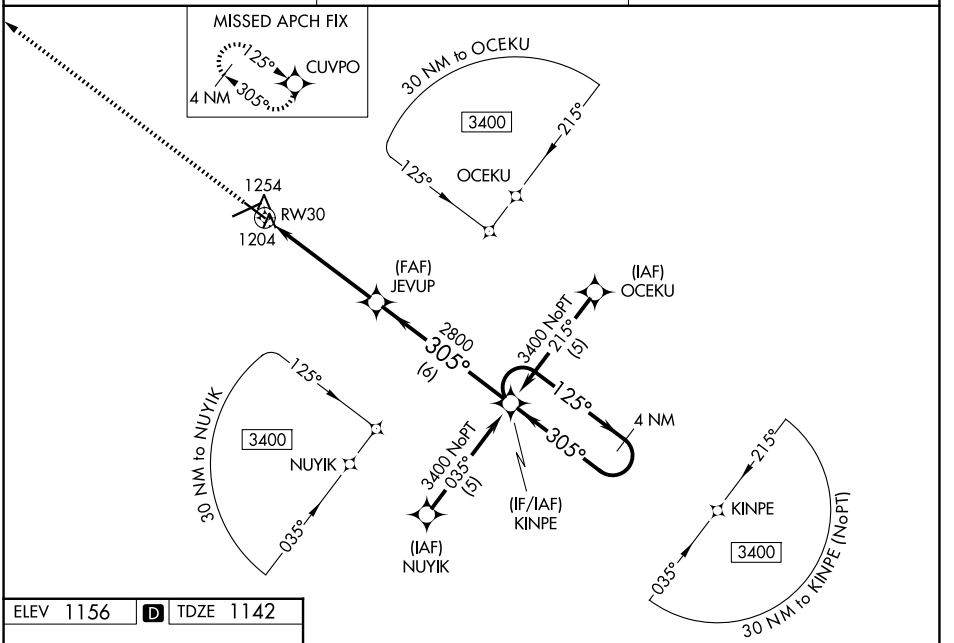

ELEV 1156 D TDZE 1142



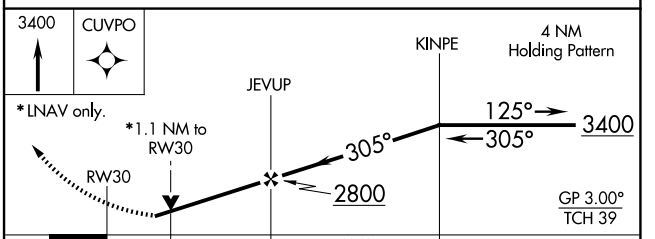

CATEGORY	A	B	C	D
LPV DA	1424-1 282 (300-1)			
LNAV/VNAV DA	1474-1¼ 332 (400-1¼)			
LNAV MDA	1520-1 378 (400-1)			1520-1¼ 378 (400-1¼)
CIRCLING	1560-1 404 (500-1)	1620-1 464 (500-1)	1740-1½ 584 (600-1½)	2080-3 924 (1000-3)

MIRL Rwy 12-30 L
HIRL Rwy 6-24 L
REIL Rwys 12, 24 and 30 L

NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026