RNAV (GPS) RWY 6

FORT DODGE RGNL (FOD)

WAAS	APP CRS	Rwy Ldg	6547
CH 61015	063°	TDZE	1107
W06A		Apt Elev	1156


RNP APCH - GPS.

T A Baro-VNAV and VDP NA when using EBS altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use EBS altimeter setting: increase LPV DA to 1349 feet; increase LNAV/VNAV DA to 1567 feet; increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM and Circling visibility Cat C ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅛ SM and LNAV Cat D visibility to 1⅛ SM.


MALSR

MISSED APPROACH: Climb to 3000 direct OXDAH and hold.


AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
118.775	134.0 288.3	123.0 (CTAF) L

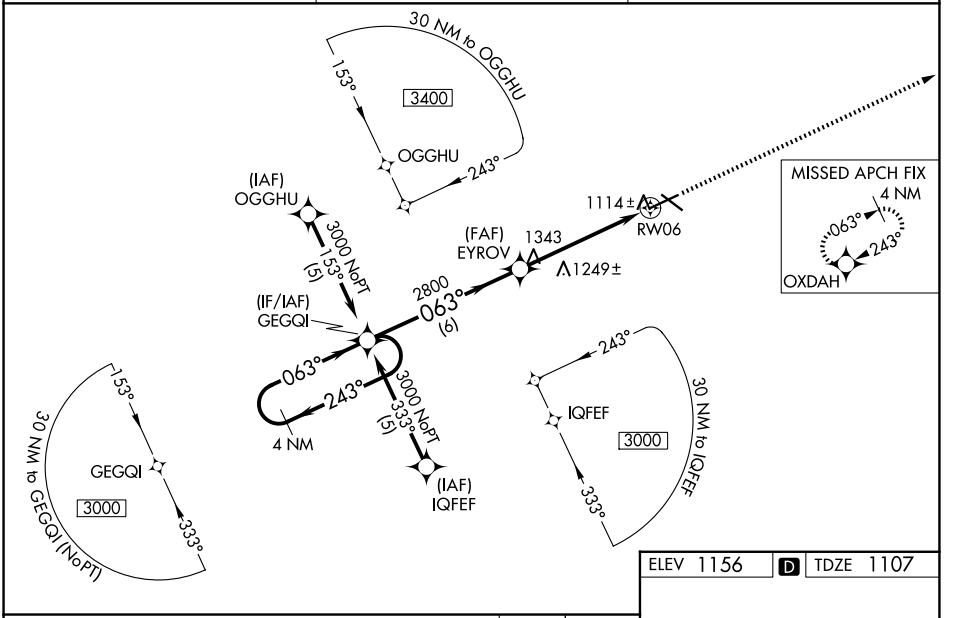

ELEV 1156 D TDZE 1107

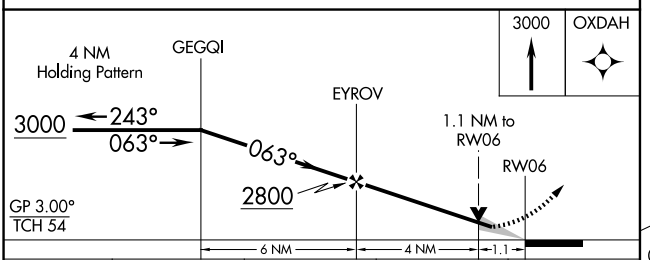

CATEGORY	A	B	C	D
LPV DA	1307-½ 200 (200-½)			
LNAV/VNAV DA	1525-1 418 (400-1)			
LNAV MDA	1500-½ 393 (400-½)		1500-⅝ 393 (400-⅝)	1500-1 393 (400-1)
CIRCLING	1560-1 404 (500-1)	1620-1 464 (500-1)	1740-1½ 584 (600-1½)	2080-3 924 (1000-3)



MIRL Rwy 12-30 L
HIRL Rwy 6-24 L
REIL Rwys 12, 24 and 30 L

NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026