ILS or LOC RWY 32

MC ALLEN INTL (MFE)


LOC/DME I-LLM	APP CRS	Rwy Ldg 7120
111.7	317°	TDZE 102
Chan 54		Apt Elev 107

Circling NA northeast of Rwy 14-32. ADF and DME or Radar required. When local altimeter setting not received, use Weslaco altimeter setting: increase all DA 39 feet and MDA 40 feet.


MISSED APPROACH: Climb to 2100 direct MF LOM and hold

ATIS	VALLEY APP CON	MC ALLEN TOWER ★	GND CON	UNICOM
128.5	126.55 377.2	118.5 (CTAF) L 256.9	121.8	122.95

DME or RADAR REQUIRED

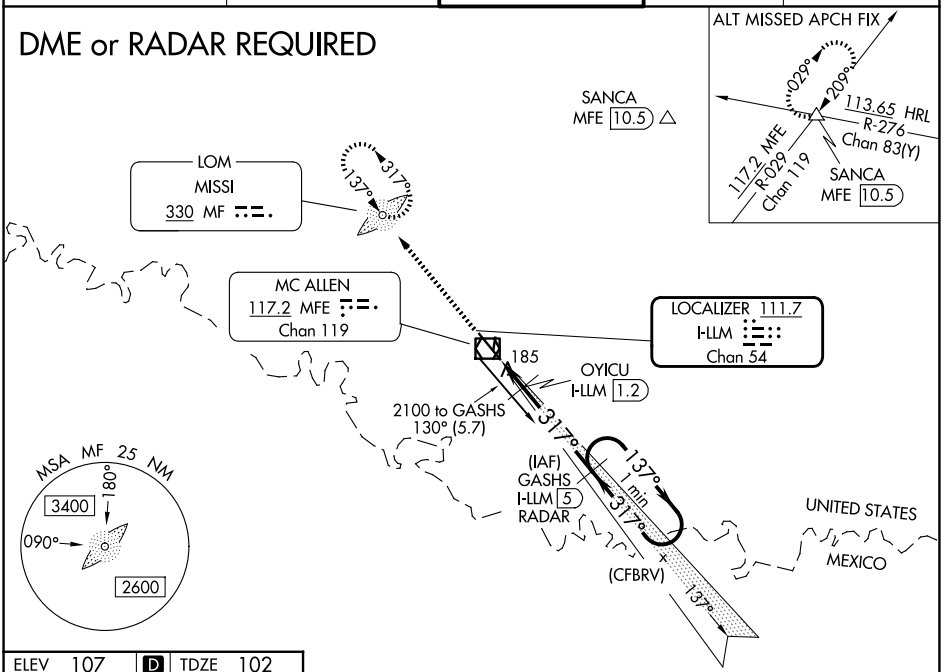

ELEV 107 D TDZE 102

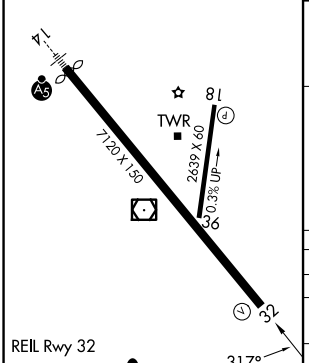

REIL Rwy 32
HIRL Rwy 14-32 L
MIRL Rwy 18-36 L

FAF to MAP 5.2 NM


Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

2100 MF

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 53).

GASHS
I-LLM 5
RADAR

One Minute Holding Pattern

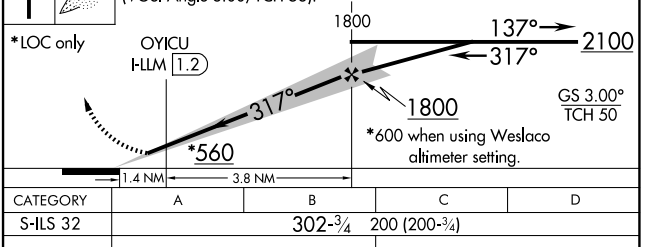

CATEGORY	A	B	C	D
S-ILS 32	302-¾ 200 (200-¾)			
S-LOC 32	560-1 458 (500-1)		560-1⅜ 458 (500-1⅜)	
CIRCLING	580-1 473 (500-1)		580-1½ 473 (500-1½)	800-2¼ 693 (700-2¼)
OYICU FIX MINIMUMS				
S-LOC 32	440-1 338 (400-1)			
CIRCLING	580-1 473 (500-1)		580-1½ 473 (500-1½)	800-2¼ 693 (700-2¼)

SC-3, 26 NOV 2026 to 24 DEC 2026
SC-3, 26 NOV 2026 to 24 DEC 2026