WAAS	APP CRS	Rwy Ldg	6983
CH 78400	137°	TDZE	107
W14A		Apt Elev	107

RNAV (GPS) RWY 14

MC ALLEN INTL (MFE)


RNP APCH-GPS.


Circling NA northeast of Rwy 14-32. For inop ALS, increase LNAV/VNAV visibility all Cats to ⅞ SM and LNAV visibility Cat C/D to 1⅛ SM. For inop ALS when using Weslaco altimeter setting, increase LNAV/VNAV visibility all Cats to 1 SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. When local altimeter setting not received, use Weslaco altimeter setting and increase all DA 39 feet and LNAV/VNAV all Cats visibility ⅛ SM; increase all MDA 40 feet and LNAV Cat C/D visibility ⅛ SM.


MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 3000 direct FLATZ and hold.

ATIS	VALLEY APP CON	MC ALLEN TOWER ★	GND CON	UNICOM
128.5	126.55 377.2	118.5 (CTAF) L 256.9	121.8	122.95

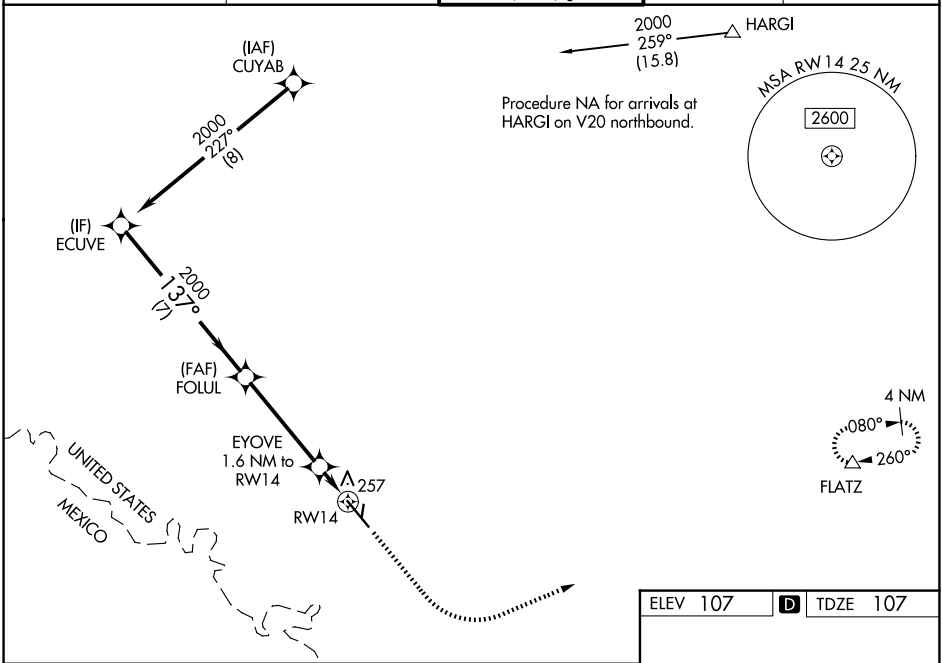

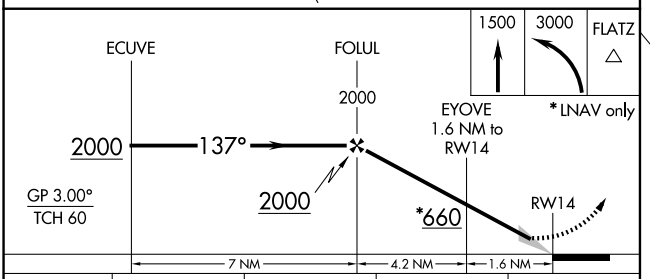

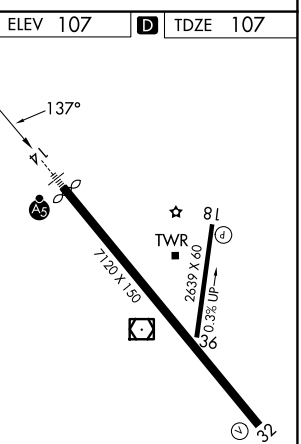

CATEGORY	A	B	C	D
LPV DA	307-½ 200 (200-½)			
LNAV/VNAV DA	418-½ 311 (400-½)			
LNAV MDA	520-½ 413 (500-½)		520-¾ 413 (500-¾)	
CIRCLING	580-1 473 (500-1)		580-1½ 473 (500-1½)	800-2¼ 693 (700-2¼)

REIL Rwy 32
HIRL Rwy 14-32 L
MIRL Rwy 18-36 L

SC-3, 26 NOV 2026 to 24 DEC 2026
SC-3, 26 NOV 2026 to 24 DEC 2026