VOR/DME MFE	APP CRS	Rwy Ldg	6983
117.2	134°	TDZE	107
Chan 119		Apt Elev	107

VOR RWY 14

MC ALLEN INTL (MFE)


Circling NA northeast of Rwy 14-32. ADF or DME required. For inop MALSR, increase S-14 Cat C/D visibility to 1⅜ mile. When local altimeter setting not received, use Weslaco altimeter setting and increase all MDA 40 feet and S-14 Cat C/D and Circling Cat C visibility ⅛ mile. VDP NA when using Weslaco altimeter setting.


MALSR


MISSED APPROACH: Climb to 1000 then climbing left turn to 2000 direct MFE VOR/DME and hold.

ATIS	VALLEY APP CON	MC ALLEN TOWER ★	GND CON	UNICOM
128.5	126.55 377.2	118.5 (CTAF) L 256.9	121.8	122.95

ADF or DME REQUIRED

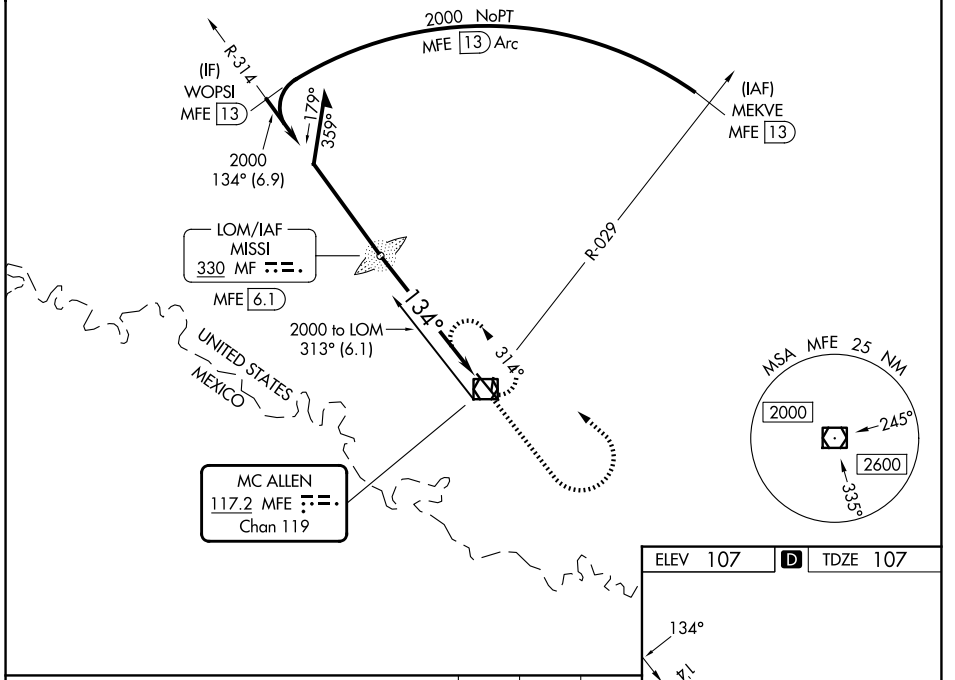

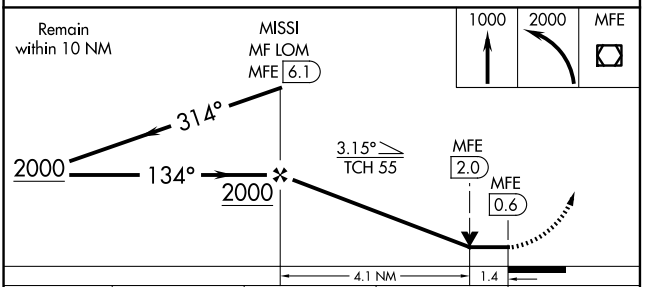

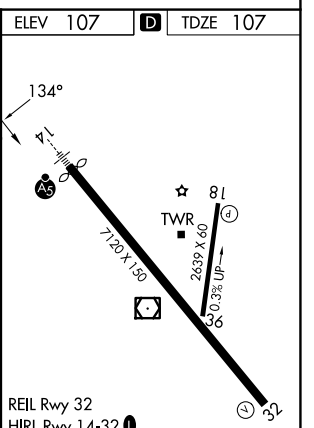

CATEGORY	A	B	C	D
S-14	620-½ 513 (600-½)		620-1 513 (600-1)	
CIRCLING	620-1 513 (600-1)		620-1½ 513 (600-1½)	800-2¼ 693 (700-2¼)

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

SC-3, 26 NOV 2026 to 24 DEC 2026
SC-3, 26 NOV 2026 to 24 DEC 2026