WAAS CH 77549 W36A	APP CRS 005°	Rwy Ldg 6500 TDZE 47 Apt Elev 66

RNAV (GPS) RWY 36

ST PAUL ISLAND (SNP) (PASN)


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -13°C or above 54°C. Inop table does not apply to LPV, LNAV/VNAV and LNAV Cat A and B. When local altimeter setting not received, procedure NA. Circling NA west of Rwy 18-36. For inop ALS, increase LNAV Cats C/D visibility to 1⅜ SM.

MALSF


MISSED APPROACH: Climb to 2300 direct KUNNA and hold, continue climb-in-hold to 2300.

ASOS	ANCHORAGE CENTER	CTAF
135.75	119.1 339.8	122.3 L

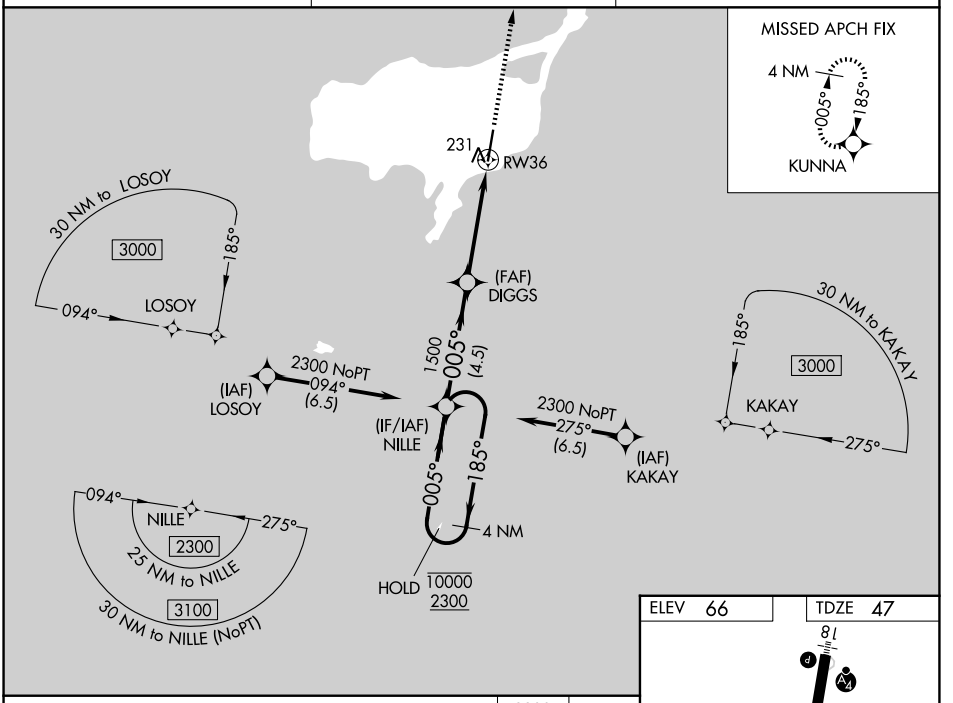

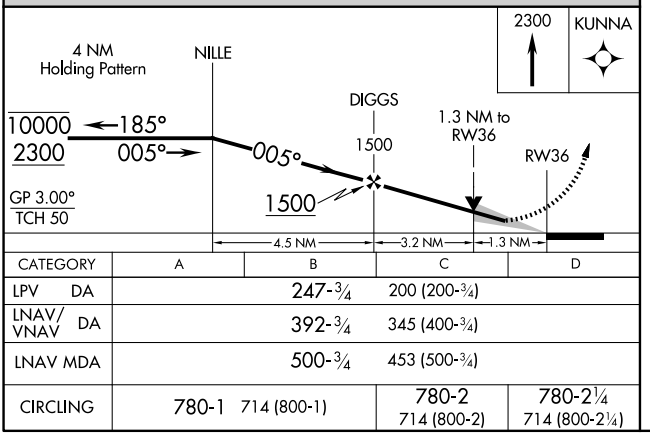

CATEGORY	A	B	C	D
LPV DA		247-¾	200 (200-¾)	
LNAV/VNAV DA		392-¾	345 (400-¾)	
LNAV MDA		500-¾	453 (500-¾)	
CIRCLING	780-1 714 (800-1)		780-2 714 (800-2)	780-2¼ 714 (800-2¼)

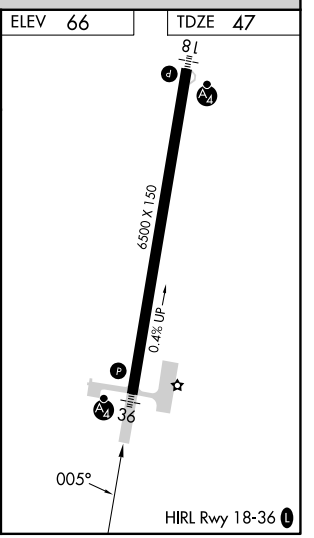

AK, 29 OCT 2026 to 24 DEC 2026
AK, 29 OCT 2026 to 24 DEC 2026