RNAV (GPS) RWY 27L

OAKLAND COUNTY INTL (PTK)


WAAS CH 70615 W27A	APP CRS 275°	Rwy Ldg 6520 / TDZE 974 / Apt Elev 981

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using DET altimeter setting. Circling Rwy 9L, 36 NA at night. When local altimeter setting not received, use DET altimeter setting: increase LPV DA to 1280 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1566 feet; increase all MDAs 120 feet and LNAV visibility Cat C ⅜ SM, LNAV visibility Cat D ¼ SM, and Circling visibility Cats C/D ½ SM.


MISSED APPROACH: Climb to 3000 direct EDESE and hold.

ATIS	DETROIT APP CON	PONTIAC TOWER ★	GND CON	UNICOM
125.025	132.35 284.0	120.5 (CTAF) L	121.9	122.95

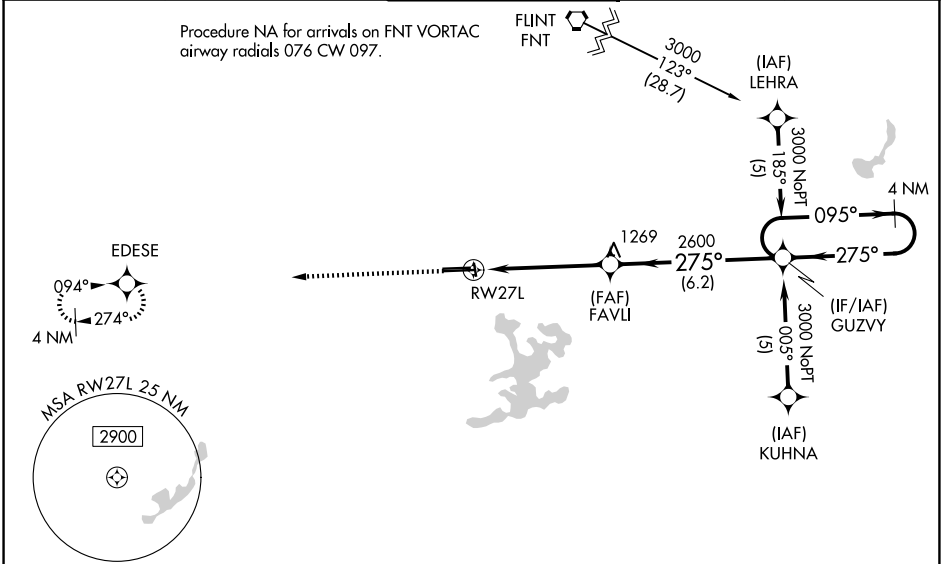

ELEV 981	D	TDZE 974



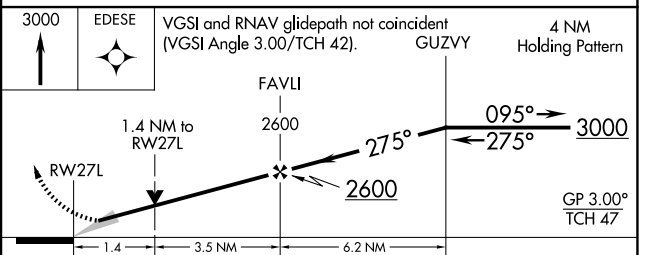

CATEGORY	A	B	C	D
LPV DA	1174-¾ 200 (200-¾)			
LNAV/VNAV DA	1460-1¾ 486 (500-1¾)			
LNAV MDA	1460-1 486 (500-1)		1460-1⅜ 486 (500-1⅜)	1460-1½ 486 (500-1½)
CIRCLING	1500-1 519 (600-1)	1540-1 559 (600-1)	1640-1¾ 659 (700-1¾)	1640-2 659 (700-2)

HIRL Rwy 9R-27L L
MIRL Rwy 9L-27R
REIL Rwy 27L L
REIL Rwys 9L and 27R

EC-1, 26 NOV 2026 to 24 DEC 2026
EC-1, 26 NOV 2026 to 24 DEC 2026