RNAV (GPS) RWY 33

LAKE CHARLES RGNL (LCH)

WAAS	APP CRS	Rwy Ldg	6500
CH 56215	332°	TDZE	11
W33A		Apt Elev	15


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 43°C. Inop table does not apply to LPV all Cats. For inop ALS, increase ASR LNAV/VNAV all Cats visibility to ⅞ SM.


MALSF

MISSED APPROACH: Climb to 1700 direct ZUKLA and hold.

ATIS	LAKE CHARLES APP CON★	LAKE CHARLES TOWER★	GND CON	UNICOM
118.75	119.35 353.75	120.7 (CTAF) L 257.8	121.8	122.95

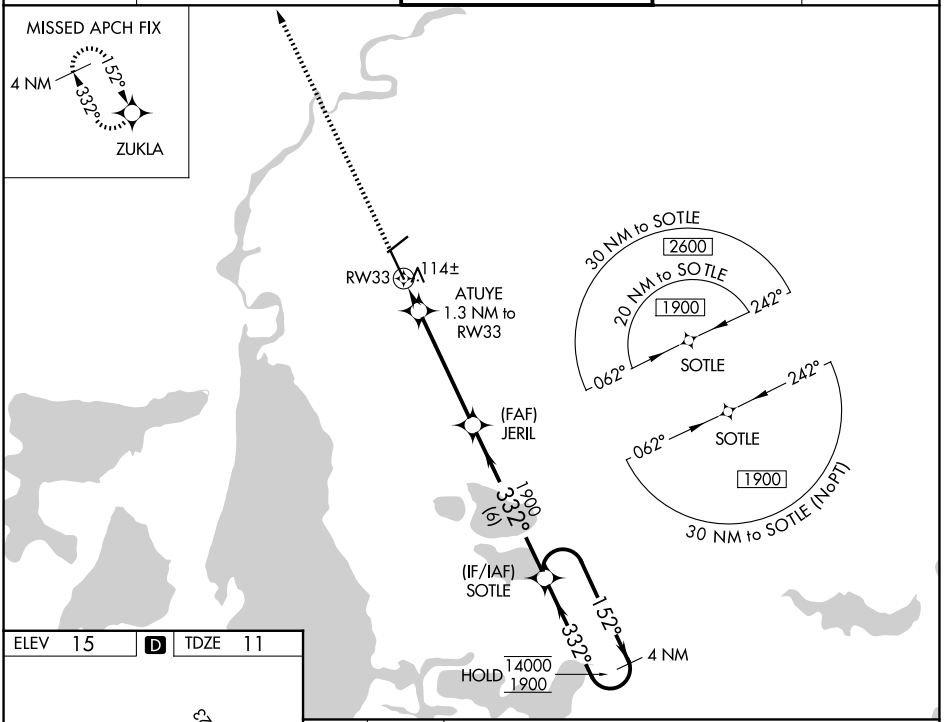

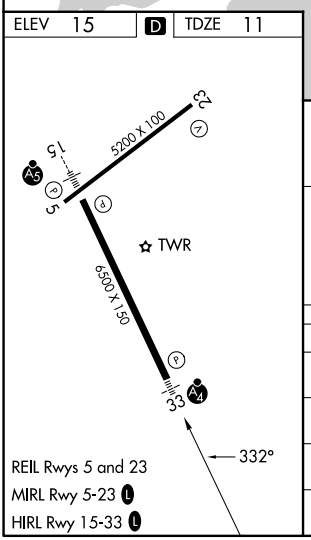

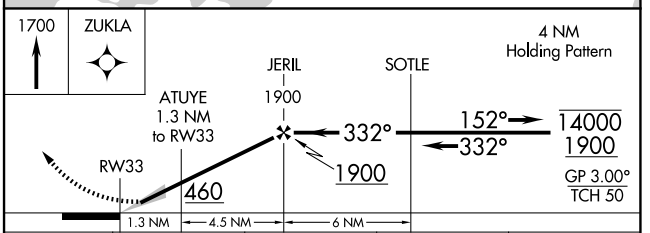

CATEGORY	A	B	C	D
LPV DA	211-¾	200 (200-¾)		
LNAV/VNAV DA	296-¾	285 (300-¾)		
LNAV MDA	380-¾	369 (400-¾)		
CIRCLING	440-1 425 (500-1)	480-1 465 (500-1)	580-1½ 565 (600-1½)	680-2 665 (700-2)

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026