LOC I-JAN	APP CRS	Rwy Ldg	8500
110.5	159°	TDZE	312
		Apt Elev	346

ILS RWY 16L (SA CAT I)


JACKSON-MEDGAR WILEY EVERS INTL (JAN)


When control tower closed, procedure NA.
When local altimeter setting not received, procedure NA.
ASR Requires specific OPSPEC, MSPEC, or LOA approval and use of HUD TO DA.

ALSF-2

MISSED APPROACH: Climb to 800 then climbing left turn to 3000 on heading 090° and on MHZ VORTAC R-134 to RAKIN INT/16.5 DME and hold, continue climb-in-hold to 3000.


ATIS	JACKSON APP CON ★	JACKSON TOWER ★	GND CON	UNICOM
121.05	123.9 317.7	120.9 (CTAF) L 352.0	121.7 348.6	122.95

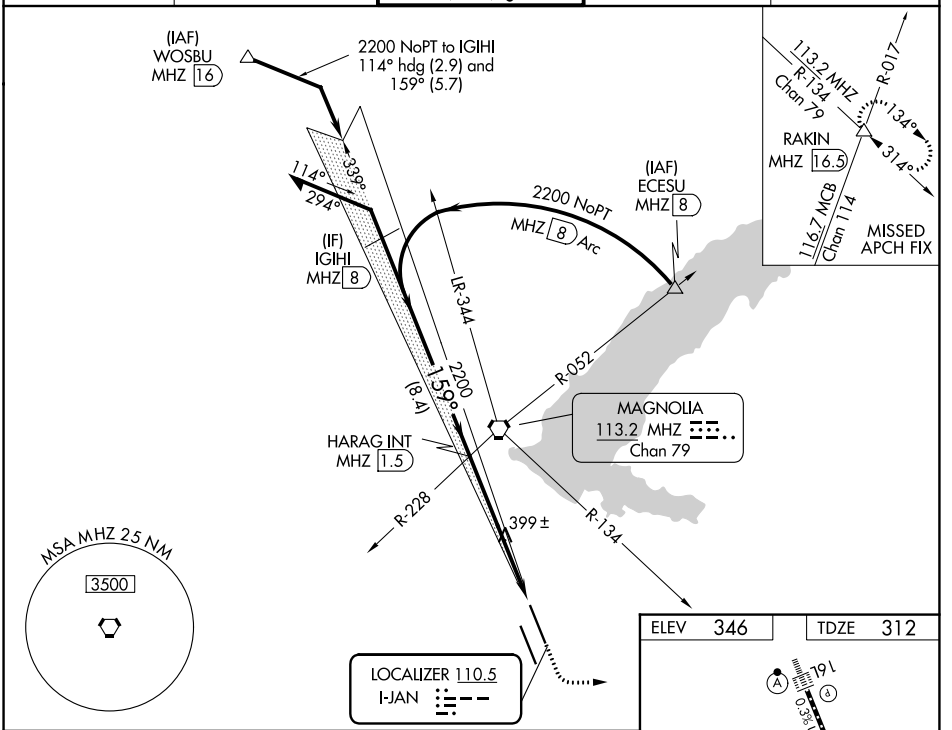

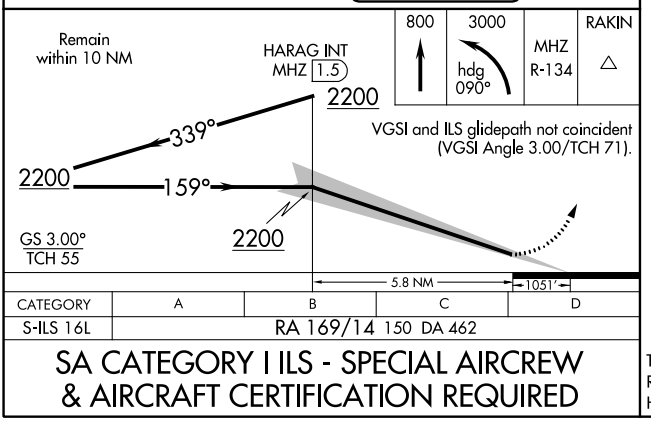

CATEGORY	A	B	C	D
S-ILS 16L	RA 169/14 150 DA 462			

SA CATEGORY I ILS - SPECIAL AIRCREW & AIRCRAFT CERTIFICATION REQUIRED

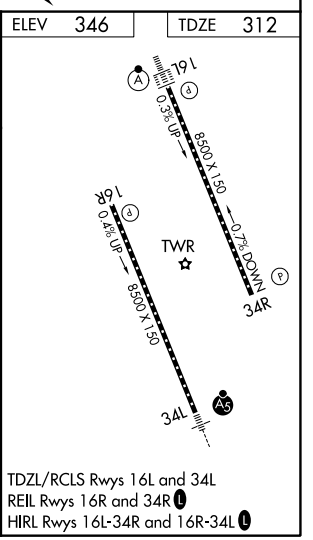

TDZL/RCLS Rwys 16L and 34L
REIL Rwys 16R and 34R L
HIRL Rwys 16L-34R and 16R-34L L

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026