VORTAC MHZ	APP CRS	Rwy Ldg	8500
113.2	349°	TDZE	346
Chan 79		Apt Elev	346


VOR/DME or TACAN RWY 34R


JACKSON-MEDGAR WILEY EVERS INTL (JAN)


T When local altimeter setting not received, use Hawkins Fld altimeter setting and increase all MDA 20 feet; increase S-34R Cats C/D/E visibility ⅛ mile.
A Circling NA for Cat E southwest of Rwy 16R-34L. Helicopter visibility reduction
ASR below ¾ SM NA.

MISSED APPROACH: Climbing right turn to 3000 on heading 120° and MHZ VORTAC R-134 to RAKIN INT/ MHZ 16.5 DME and hold.

ATIS	JACKSON APP CON★	JACKSON TOWER★	GND CON	UNICOM
121.05	123.9 317.7	120.9 (CTAF) L 352.0	121.7 348.6	122.95

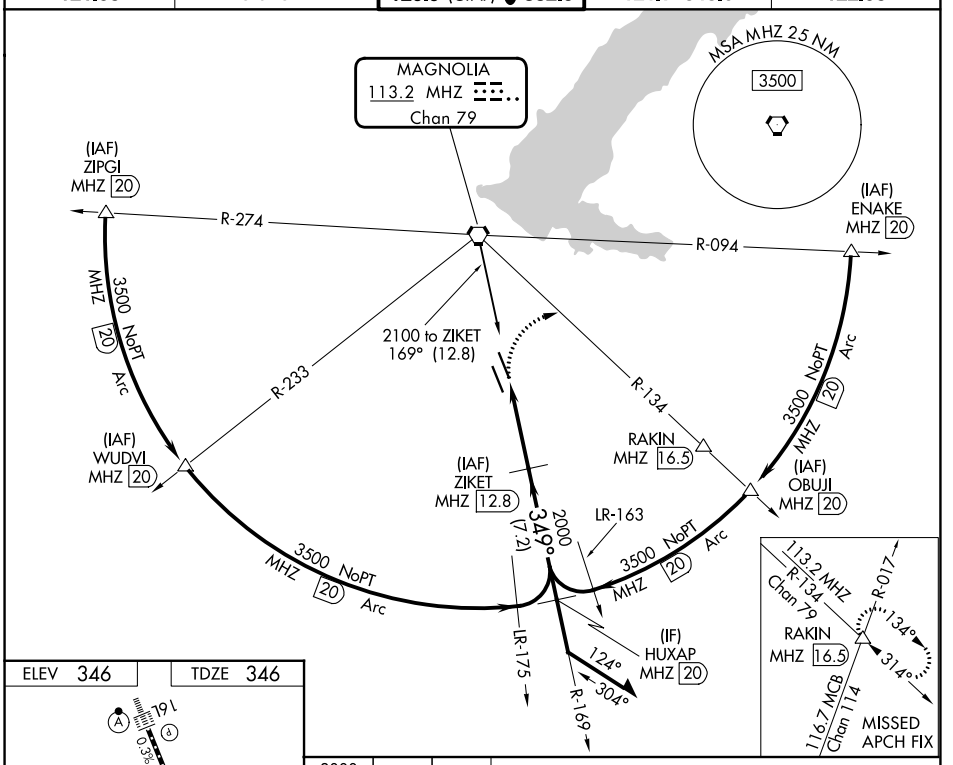

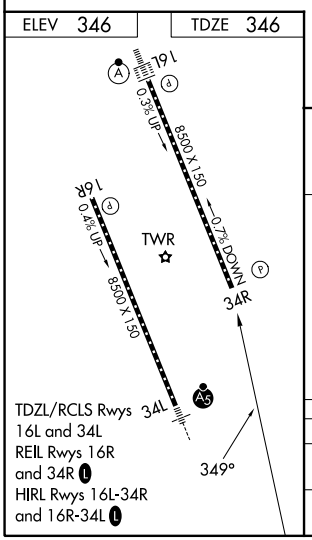

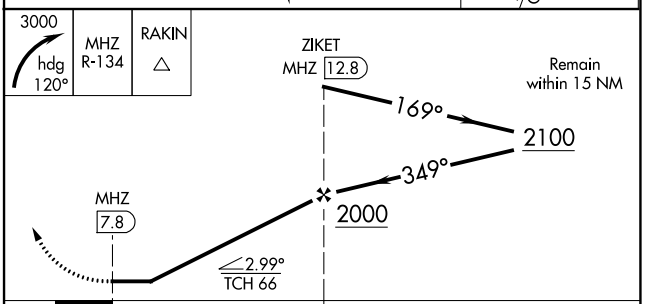

CATEGORY	A	B	C	D	E
S-34R	920/55	574 (600-1)	920-1⅝	574 (600-1⅝)	
CIRCLING	920-1	574 (600-1)	920-1½ 574 (600-1½)	960-2 614 (700-2)	1040-2½ 694 (700-2½)

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026