WAAS	APP CRS	Rwy Ldg	8001
CH 93932	007°	TDZE	1387
W01A		Apt Elev	1409


RNAV (GPS) RWY 1


BEECH FACTORY (BEC)

T NA Baro-VNAV NA when using Wichita Dwight D Eisenhower Ntl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Obtain local altimeter setting on CTAF; when not received, use Wichita Dwight D Eisenhower Ntl altimeter setting and increase all DA 36 feet and all MDA 40 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility ⅛ mile, LNAV Cat C and D and Circling Cat C and D visibility ¼ mile.

MISSED APPROACH: Climb to 3000 direct DOLBE and hold.

AWOS-3PT	WICHITA APP CON	BEECH TOWER ★	GND CON	UNICOM
119.45	134.8 269.1	126.8 (CTAF) L 313.6	121.7	122.95

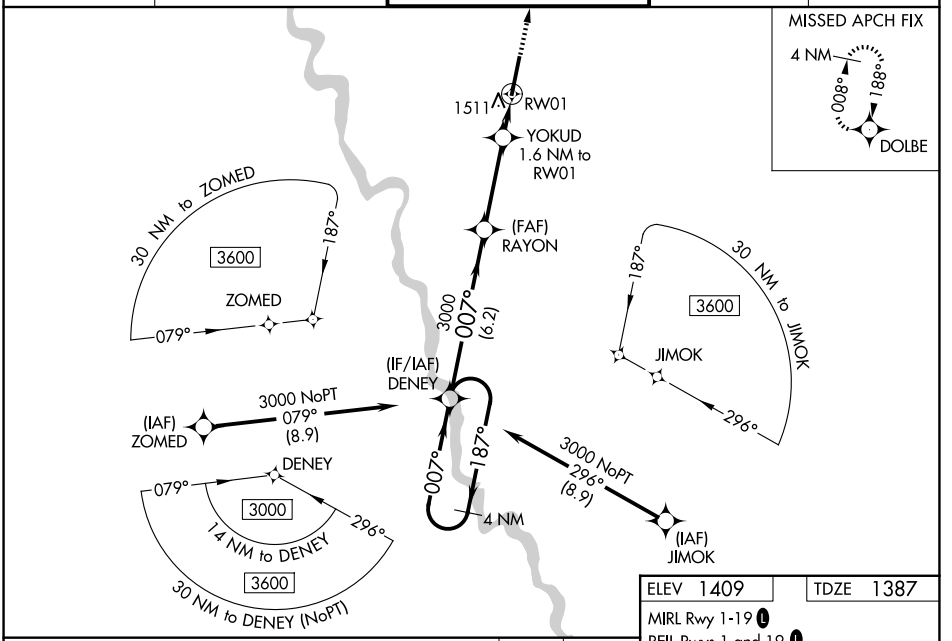

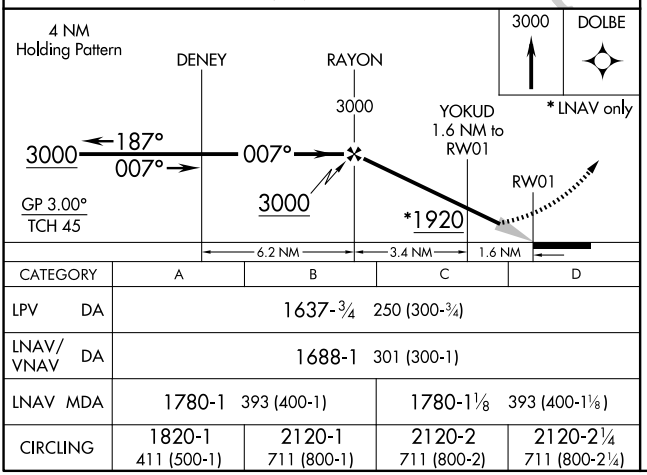


CATEGORY	A	B	C	D
LPV DA	1637-¾	250 (300-¾)		
LNAV/VNAV DA	1688-1	301 (300-1)		
LNAV MDA	1780-1	393 (400-1)	1780-1⅛	393 (400-1⅛)
CIRCLING	1820-1 411 (500-1)	2120-1 711 (800-1)	2120-2 711 (800-2)	2120-2¼ 711 (800-2¼)

ELEV 1409 TDZE 1387

MIRL Rwy 1-19 L

REIL Rwys 1 and 19 L

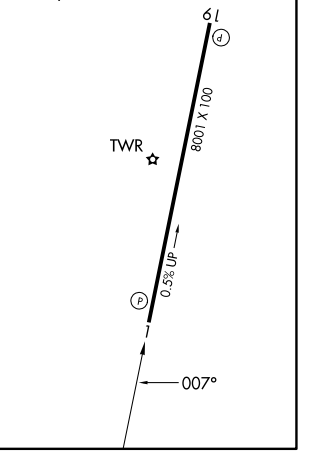

NC-2, 26 NOV 2026 to 24 DEC 2026
NC-2, 26 NOV 2026 to 24 DEC 2026