RNAV (GPS) RWY 19


BEECH FACTORY (BEC)


WAAS	APP CRS	Rwy Ldg	8001
CH 45931	188°	TDZE	1409
W19A		Apt Elev	1409

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Obtain local altimeter setting on CTAF; when not received, use Wichita Dwight D Eisenhower Ntl altimeter setting and increase all DA 36 feet and all MDA 40 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility and LNAV Cat C and D visibility ⅛ mile and Circling Cat C and D visibility ¼ mile. Baro-VNAV NA with Wichita Dwight D Eisenhower Ntl altimeter setting. Helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 3000 direct DENEY and hold.

AWOS-3PT	WICHITA APP CON	BEECH TOWER ★	GND CON	UNICOM
119.45	134.8 269.1	126.8 (CTAF) L 313.6	121.7	122.95

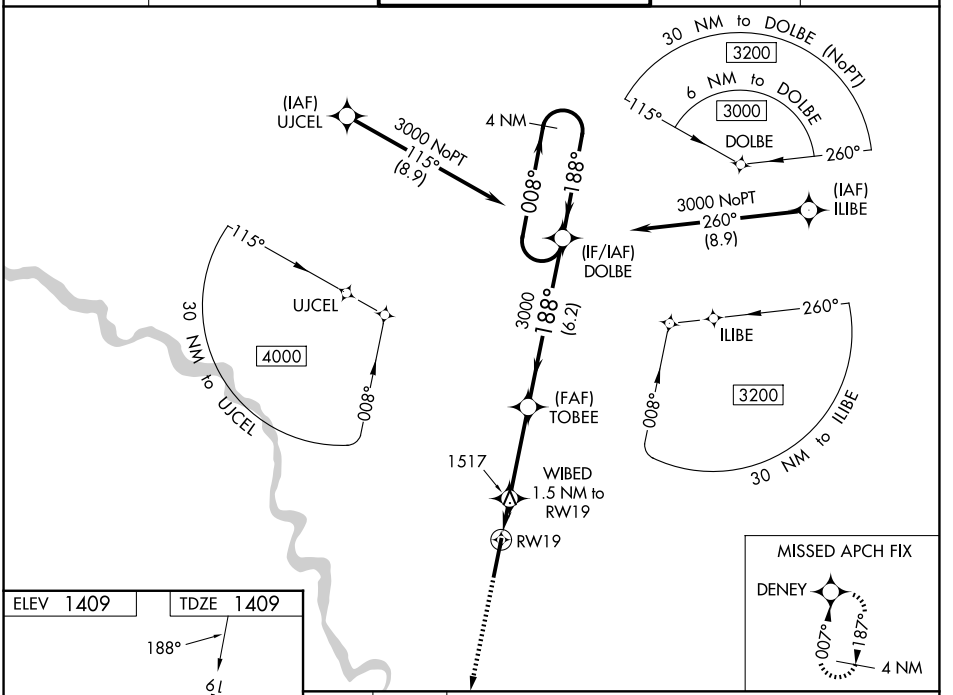

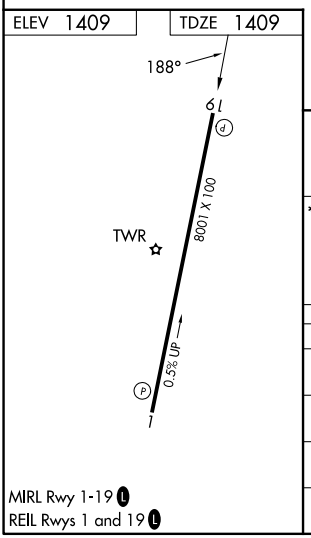

MIRL Rwy 1-19 L
REIL Rwys 1 and 19 L

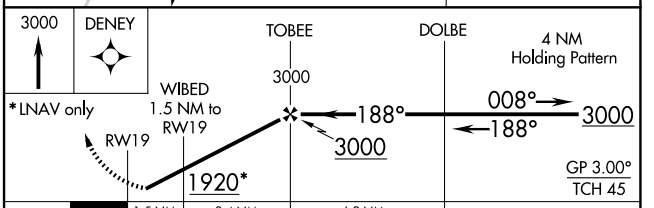

CATEGORY	A	B	C	D
LPV DA	1659-¾ 250 (300-¾)			
LNAV/VNAV DA	1659-¾ 250 (300-¾)			
LNAV MDA	1780-1 371 (400-1)			
CIRCLING	1820-1 411 (500-1)	2120-1 711 (800-1)	2120-2 711 (800-2)	2120-2¼ 711 (800-2¼)

NC-2, 26 NOV 2026 to 24 DEC 2026
NC-2, 26 NOV 2026 to 24 DEC 2026