
ASOS
120.625
SALT LAKE CENTER
133.45 317.625
UNICOM
122.8

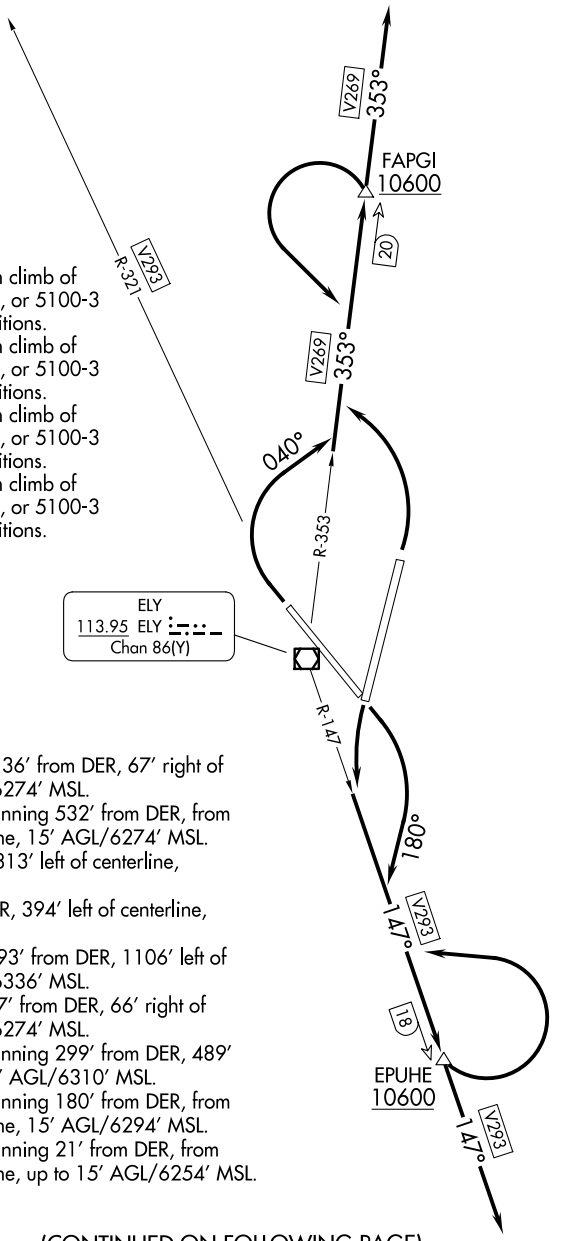

TAKEOFF MINIMUMS

Rwy 12: Standard with minimum climb of 280′ per NM to 10600, or 5100-3 for climb in visual conditions.
Rwy 18: Standard with minimum climb of 267′ per NM to 10600, or 5100-3 for climb in visual conditions.
Rwy 30: Standard with minimum climb of 539′ per NM to 10600, or 5100-3 for climb in visual conditions.
Rwy 36: Standard wtih minimum climb of 238′ per NM to 10600, or 5100-3 for climb in visual conditions.

TAKEOFF OBSTACLE NOTES

Rwy 12: Aircraft on taxiway, 136′ from DER, 67′ right of centerline, 15′ AGL/6274′ MSL.
Vehicles on road beginning 532′ from DER, from left to right of centerline, 15′ AGL/6274′ MSL.
Pole 981′ from DER, 313′ left of centerline, 40′ AGL/6295′ MSL.
Tower 2617′ from DER, 394′ left of centerline, 64′ AGL/6334′ MSL.
Antenna on tower 2893′ from DER, 1106′ left of centerline, 66′ AGL/6336′ MSL.
Rwy 18: Aircraft on taxiway 17′ from DER, 66′ right of centerline, 15′ AGL/6274′ MSL.
Multiple hangars beginning 299′ from DER, 489′ right of centerline, 35′ AGL/6310′ MSL.
Vehicles on road beginning 180′ from DER, from left to right of centerline, 15′ AGL/6294′ MSL.
Rwy 30: Vehicles on road beginning 21′ from DER, from left to right of centerline, up to 15′ AGL/6254′ MSL.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

SW-4, 26 NOV 2026 to 24 DEC 2026
SW-4, 26 NOV 2026 to 24 DEC 2026