RNAV (GPS) RWY 23


TAYLOR COUNTY (AAS)


WAAS	APP CRS	Rwy Ldg	5004
CH 50223	235°	TDZE	921
W23A		Apt Elev	921

Baro-VNAV NA when using Somerset altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Somerset altimeter setting: increase all DA 89 feet and all MDA 100 feet; increase LPV all Cats visibility ¼ mile, increase LNAV/VNAV all Cats visibility ⅜ mile, increase LNAV Cats C and D visibility ¼ mile, and increase Circling Cats C visibility ¼ mile and Cat D visibility ½ mile. Helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 3000 direct KANOA and hold.

AWOS-3	INDIANAPOLIS CENTER	UNICOM
121.125	124.625 353.65	122.7 (CTAF) L

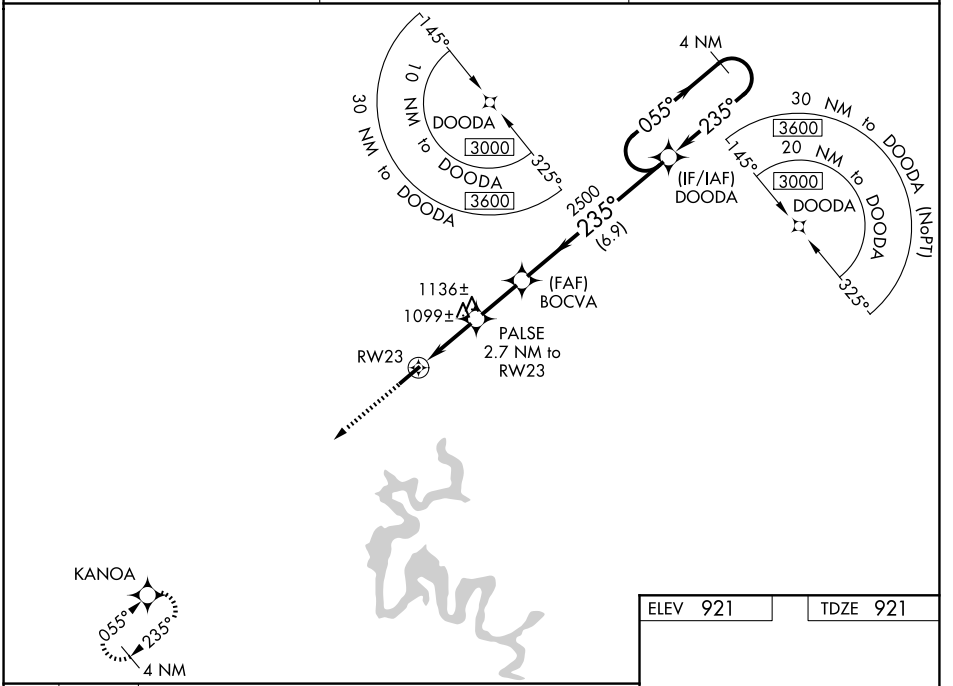

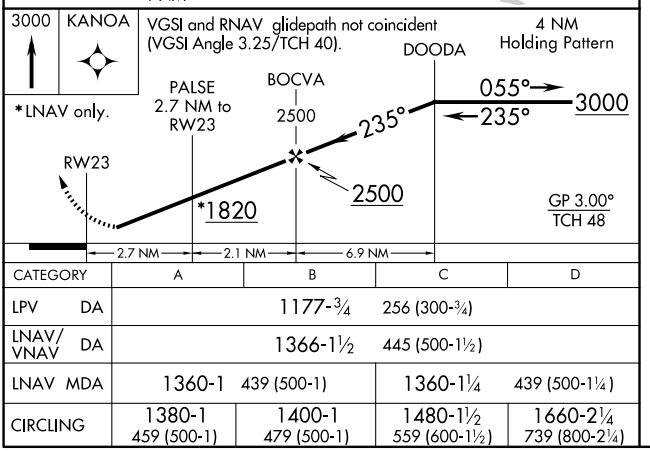

CATEGORY	A	B	C	D
LPV DA	1177-¾	256 (300-¾)		
LNAV/VNAV DA	1366-1½	445 (500-1½)		
LNAV MDA	1360-1	439 (500-1)	1360-1¼	439 (500-1¼)
CIRCLING	1380-1 459 (500-1)	1400-1 479 (500-1)	1480-1½ 559 (600-1½)	1660-2¼ 739 (800-2¼)

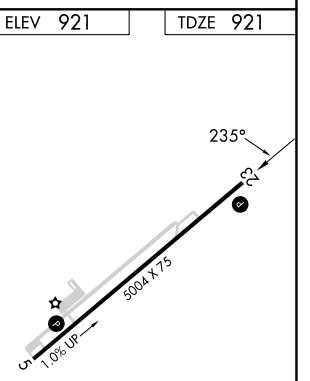

MIRL Rwy 5-23 L
REIL Rwys 5 and 23 L

SE-1, 26 NOV 2026 to 24 DEC 2026
SE-1, 26 NOV 2026 to 24 DEC 2026