ILS or LOC RWY 31

DEVILS LAKE RGNL (DVL)

LOC I-VKE	APP CRS	Rwy Ldg	6400
108.7	311°	TDZE	1450
		Apt Elev	1469

RNP APCH - GPS.


DME or RADAR required.

T NA VDP NA when using Cando altimeter setting. When local altimeter setting not received, use Cando altimeter setting and increase S-ILS 31 DA to 1711 feet; increase all MDAs 80 feet and S-LOC 31 visibility Cat C/D ⅛ SM, and Circling visibility Cat C/D ¼ SM. DME from DVL DME. DME use requires simultaneous reception of I-VKE and DVL DME. For inop ALS when using Cando altimeter setting, increase S-ILS 31 all Cats visibility to ⅞ SM. For inop ALS, increase S-LOC 31 Cat C/D visibility to 1⅜ SM.


MALSR

MISSED APPROACH: Climb to 3400 direct KRAMR and hold.


AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
125.875	124.2 270.3	122.8 (CTAF) L

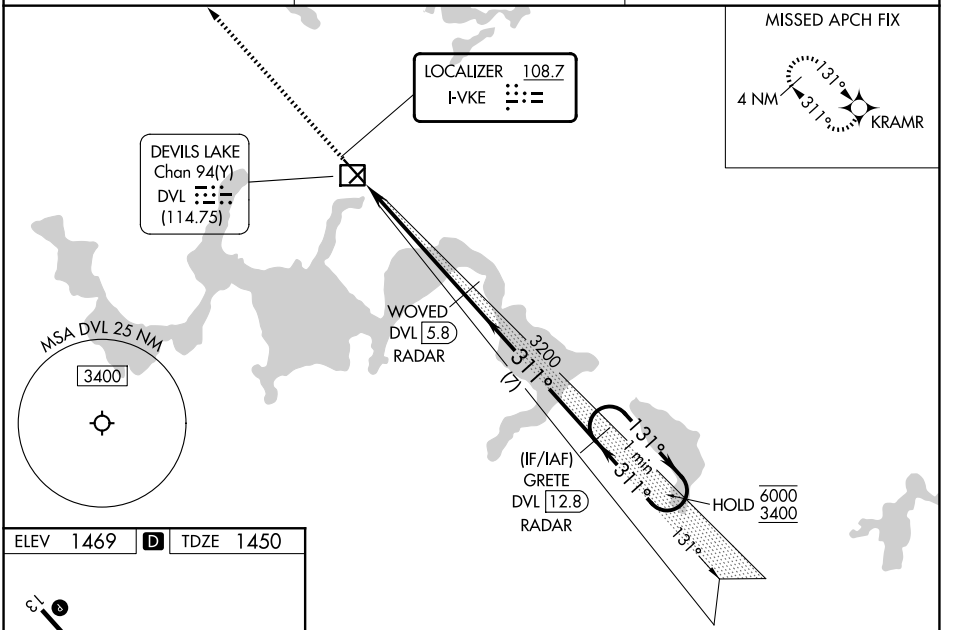

ELEV 1469 D TDZE 1450



HIRL Rwy 13-31 L
REIL Rwys 3, 13 and 21 L
MIRL Rwy 3-21 L

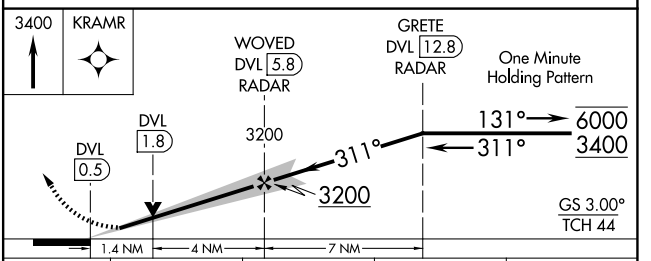

FAF to MAP 5.4 NM					
Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

CATEGORY	A	B	C	D
S-ILS 31	1650-½ 200 (200-½)			
S-LOC 31	1920-½ 470 (500-½)		1920-1 470 (500-1)	
CIRCLING	2000-1 531 (600-1)		2240-2¼ 771 (800-2¼)	2240-2½ 771 (800-2½)

NC-1, 26 NOV 2026 to 24 DEC 2026
NC-1, 26 NOV 2026 to 24 DEC 2026