WAAS CH 78417 W21A	APP CRS 218°	Rwy Ldg 4314 TDZE 1449 Apt Elev 1469

RNAV (GPS) RWY 21


DEVILS LAKE RGNL (DVL)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using 9D7 altimeter setting. Rwy 21 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use 9D7 altimeter setting and increase LPV DA to 1760 feet; increase LNAV/VNAV DA to 1901 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH: Climb to 3400 direct ZIKID and hold.


AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
125.875	124.2 270.3	122.8 (CTAF) L

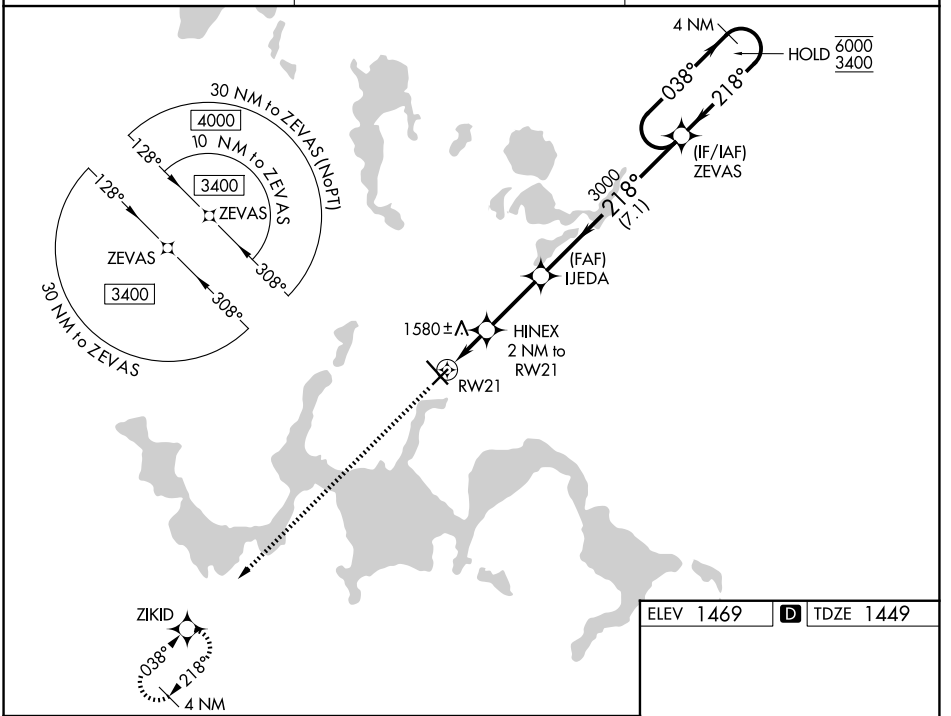

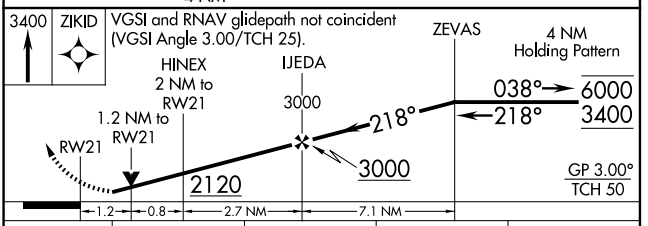

CATEGORY	A	B	C	D
LPV DA	1699-1 250 (300-1)			
LNAV/VNAV DA	1840-1⅛ 391 (400-1⅛)			
LNAV MDA	1840-1 391 (400-1)		1840-1⅛ 391 (400-1⅛)	
CIRCLING	2000-1 531 (600-1)		2240-2¼ 771 (800-2¼)	2240-2½ 771 (800-2½)

ELEV 1469 D TDZE 1449



HIRL Rwy 13-31 L
REIL Rwys 3, 13 and 21 L
MIRL Rwy 3-21 L

NC-1, 26 NOV 2026 to 24 DEC 2026
NC-1, 26 NOV 2026 to 24 DEC 2026