WAAS	APP CRS	Rwy Ldg	5701
CH 72717	014°	TDZE	956
W01A		Apt Elev	956

RNAV (GPS) RWY 1

AMES MUNI (AMW)


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). For inop ALS, increase LPV all Cats visibility to ⅞ SM, LNAV/VNAV all Cats visibility to 1⅛ SM, LNAV Cats A/B visibility to 1 SM, and LNAV Cat C visibility to 1⅜ SM.

MALSR


MISSED APPROACH: Climb to 3000 direct FULLE and hold.

ASOS	DES MOINES APP CON	CLNC DEL	UNICOM
132.025	123.9 307.15	126.0	122.7 (CTAF) L

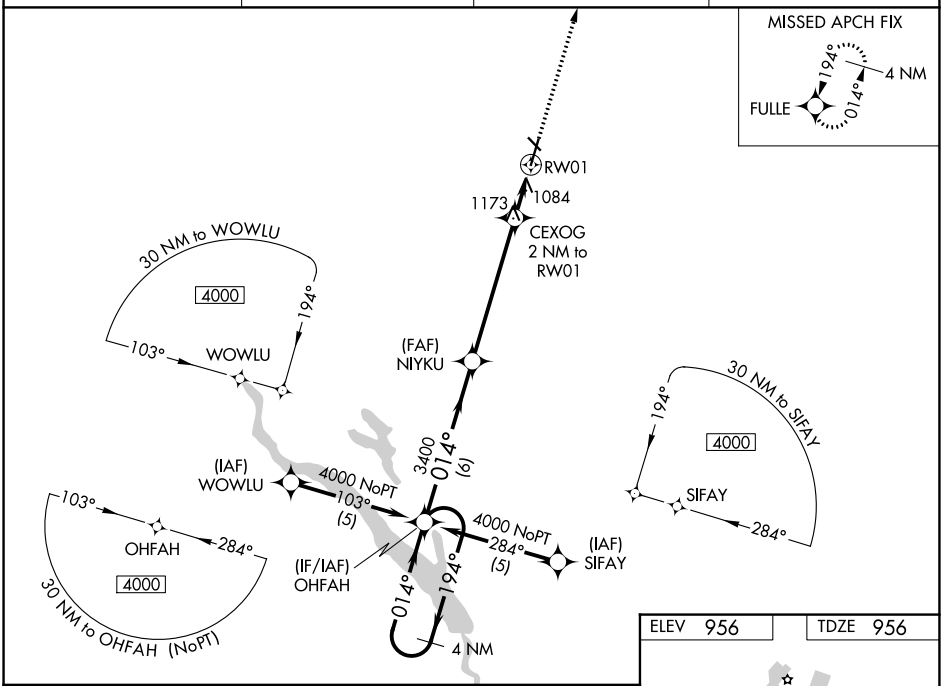

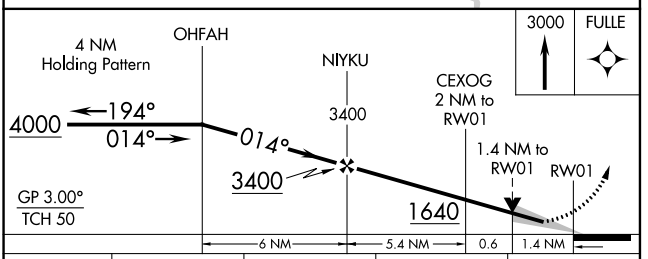

CATEGORY	A	B	C	D
LPV DA	1261-¾ 305 (400-¾)			NA
LNAV/VNAV DA	1364-1 408 (500-1)			NA
LNAV MDA	1440-¾ 484 (500-¾)		1440-1 484 (500-1)	NA
CIRCLING	1440-1 484 (500-1)	1460-1 504 (600-1)	1640-2 684 (700-2)	NA

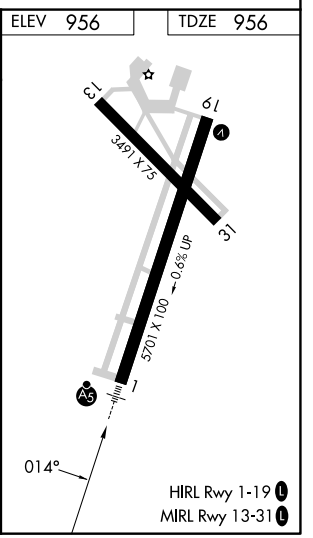

NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026