RNAV (GPS) RWY 35

OUTLAW FLD (CKV)

WAAS	APP CRS	Rwy Ldg	5999
CH 58300	347°	TDZE	550
W35A		Apt Elev	550


RNP APCH - GPS.

Circling NA west of Rwy 17-35. Circling Rwy 17 NA at night. When local altimeter setting not received, use HOP altimeter setting. Baro-VNAV and VDP NA when using HOP altimeter setting. Rwy 35 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM.


MALS


MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct GICEB and hold, continue climb-in-hold to 3000.

ASOS	CAMPBELL APP CON	UNICOM
134.575	134.35 307.025	122.8 (CTAF) L

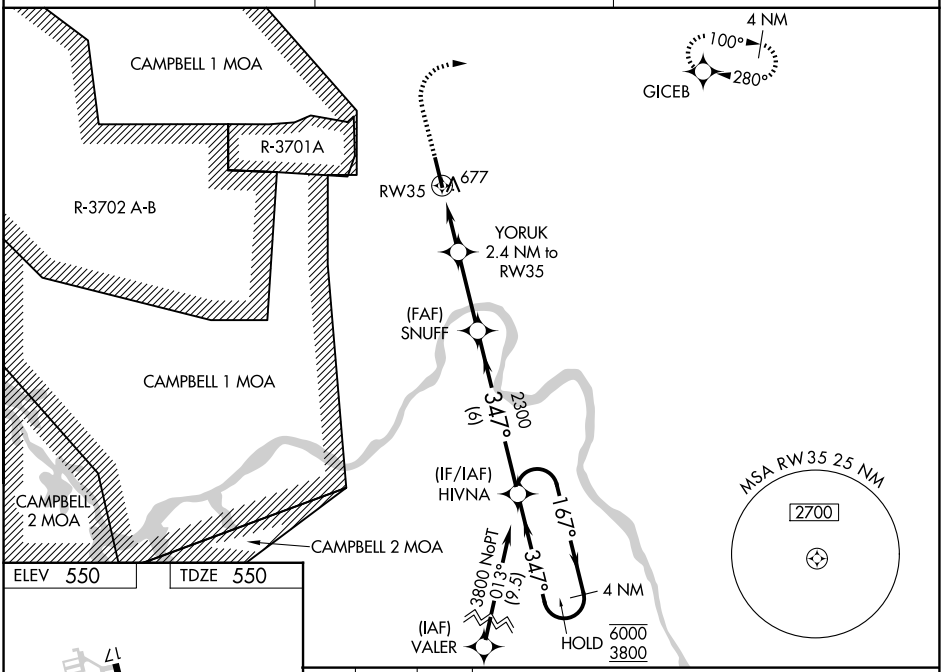

ELEV 550 TDZE 550

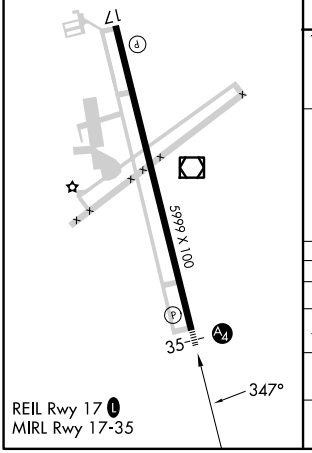

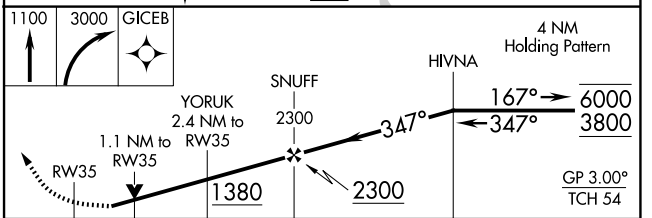

CATEGORY	A	B	C	D
LPV DA	808-¾ 258 (300-¾)			
LNAV/VNAV DA	838-¾ 288 (300-¾)			
LNAV MDA	940-¾ 390 (400-¾)		940-⅞ 390 (400-⅞)	
CIRCLING	1000-1 450 (500-1)	1020-1 470 (500-1)	1020-1½ 470 (500-1½)	1200-2 650 (700-2)

SE-1, 26 NOV 2026 to 24 DEC 2026
SE-1, 26 NOV 2026 to 24 DEC 2026