WAAS CH 86738 W07A	APP CRS 075°	Rwy Ldg 3502 / TDZE 8 / Apt Elev 8

RNAV (GPS) RWY 7

PROVINCETOWN MUNI (PVC)


RNP APCH - GPS.

Baro-VNAV and VDP NA when using HYA altimeter setting. Circling Rwy 25 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Inop table does not apply to LPV. For inop ALS when using HYA altimeter setting, increase LPV and LNAV/VNAV all Cats visibility to ⅞ SM. When local altimeter setting not received, use HYA altimeter setting: increase LPV DA to 271 feet, increase LNAV/VNAV DA to 331 feet; increase all MDA 80 feet.


MALSF

MISSED APPROACH: Climb to 3000 direct WULGA and hold.


AWOS-3PT	BOSTON APP CON	CLNC DEL	UNICOM	
119.275	118.2	120.65	122.8 (CTAF)	122.85 L

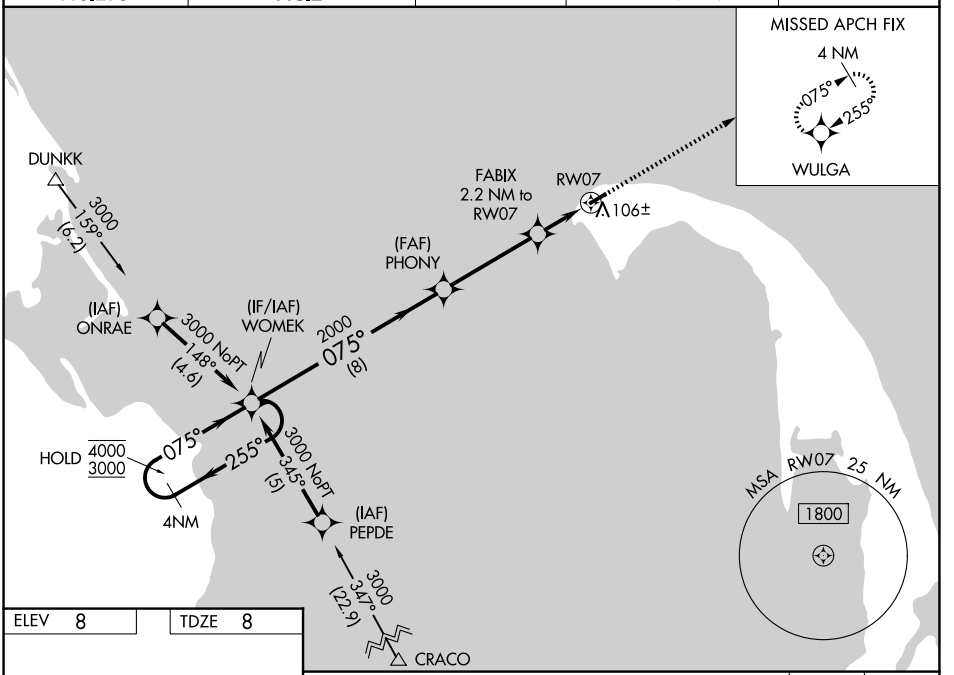

ELEV 8 TDZE 8



REIL Rwy 25 L
HIRL Rwy 7-25 L

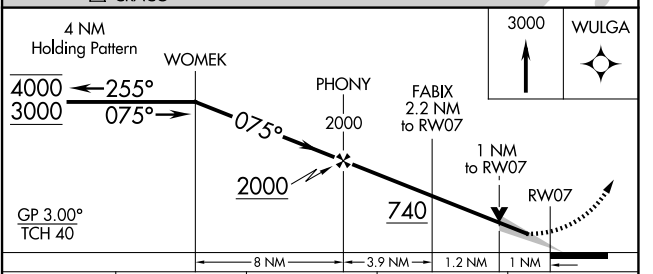

CATEGORY	A	B	C	D
LPV DA	208-¾	200 (200-¾)	NA	
LNAV/VNAV DA	268-¾	260 (300-¾)	NA	
LNAV MDA	360-¾	352 (400-¾)	NA	
CIRCLING	460-1 452 (500-1)	660-1 652 (700-1)	NA	

NE-1, 26 NOV 2026 to 24 DEC 2026
NE-1, 26 NOV 2026 to 24 DEC 2026