LOC I-IMT	APP CRS	Rwy Ldg	6502
111.5	010°	TDZE	1133
		Apt Elev	1182

ILS or LOC RWY 1
FORD (IMT)


DME required. RADAR required for procedure entry.

V A NA — Circling Rwy 13, 31 NA at night. VDP NA when using ESC altimeter setting. Circling NA northeast of Rwys 19 and 31. DME from IMT DME. DME use requires simultaneous reception of I-IMT and IMT DME. When local altimeter setting not received, use ESC altimeter setting: increase S-ILS 1 DA to 1513 feet and all visibilities ⅛ SM; increase all MDAs 180 feet and S-LOC 1 visibility Cat C and D ½ SM, and Circling visibility Cat C and D ¾ SM. For inop ALS when using ESC altimeter setting, increase S-ILS 1 all Cats visibility to 1 SM and S-LOC 1 Cats C and D visibility to 1¾ SM.

MALSR A5

MISSED APPROACH: Climb to 3400 on I-IMT LOC course (010°) to IZLAR/IMT 12 DME and hold.

ASOS	MINNEAPOLIS CENTER	UNICOM
119.025	121.25 322.5	122.8 (CTAF) L

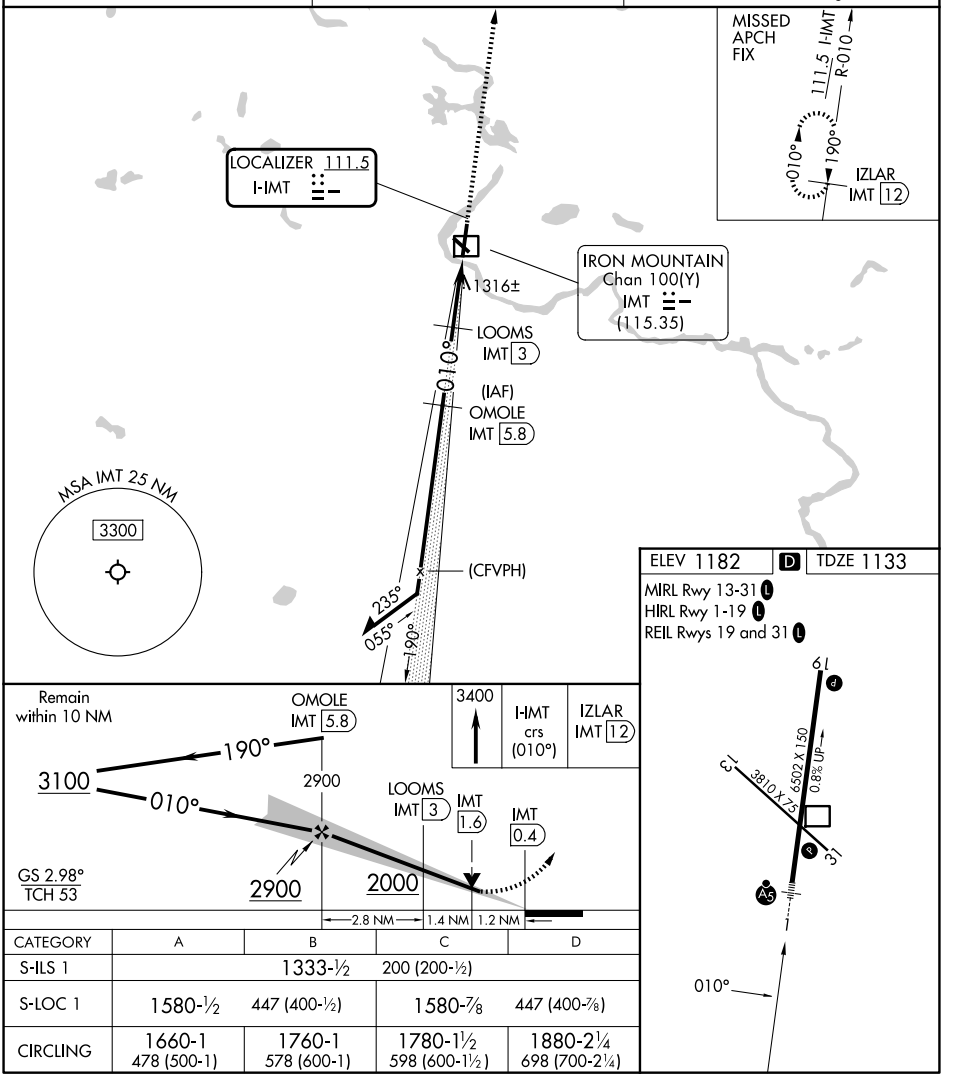

CATEGORY	A	B	C	D
S-ILS 1	1333-½		200 (200-½)	
S-LOC 1	1580-½	447 (400-½)	1580-⅞	447 (400-⅞)
CIRCLING	1660-1 478 (500-1)	1760-1 578 (600-1)	1780-1½ 598 (600-1½)	1880-2¼ 698 (700-2¼)

EC-1, 26 NOV 2026 to 24 DEC 2026
EC-1, 26 NOV 2026 to 24 DEC 2026