RNAV (GPS) RWY 18

WEEDON FLD (EUF)

WAAS CH 86723 W18A	APP CRS 188°	Rwy Ldg 5000 TDZE 285 Apt Elev 285


RNP APCH - GPS.


▼ NA


When local altimeter setting not received, use Columbus, GA altimeter setting and increase LPV DA to 632 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 739 feet and all visibilities ⅛ SM; increase all MDAs 40 feet and LNAV visibility Cats C and D ⅛ SM and Circling visibility Cats C and D ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using Columbus, GA altimeter setting.


MISSED APPROACH: Climb to 1300 then climbing right turn to 2200 direct EPICU and hold.

ASOS	ATLANTA APP CON ★	CLNC DEL	UNICOM
128.325	125.5 323.1	134.25 339.8	122.8 (CTAF) L






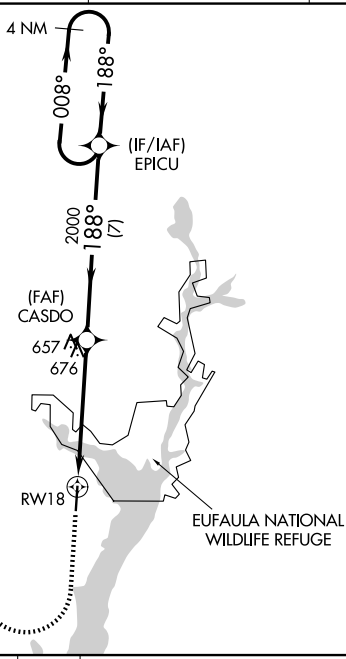

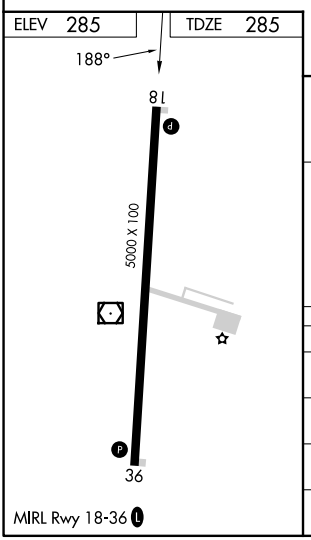

MIRL Rwy 18-36 L

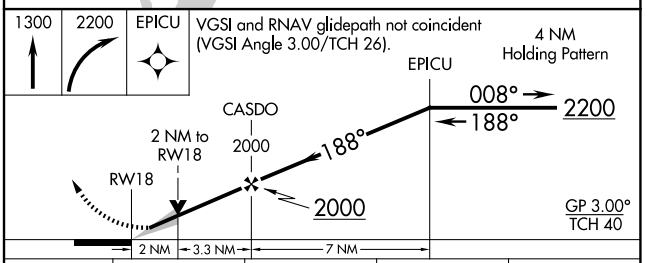

CATEGORY	A	B	C	D
LPV DA	599-1 314 (400-1)			
LNAV/VNAV DA	706-1¼ 421 (500-1¼)			
LNAV MDA	940-1 655 (700-1)		940-1⅞ 655 (700-1⅞)	
CIRCLING	940-1 655 (700-1)		1060-2¼ 775 (800-2¼)	1060-2½ 775 (800-2½)

SE-4, 26 NOV 2026 to 24 DEC 2026
SE-4, 26 NOV 2026 to 24 DEC 2026