RNAV (GPS) RWY 36

WEEDON FLD (EUF)

WAAS	APP CRS	Rwy Ldg	5000
CH 90522	008°	TDZE	285
W36A		Apt Elev	285

RNP APCH - GPS.

When local altimeter setting not received, use Columbus, GA altimeter setting and increase LPV DA to 633 feet and all visibilities 1⅛ SM; increase LNAV/VNAV DA to 782 feet; increase all MDAs 40 feet and LNAV and Circling visibility Cats C and D ¼ SM. Rwy 36 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using Columbus, GA altimeter setting.


NA


MISSED APPROACH: Climb to 2200 direct EPICU and hold.

ASOS	ATLANTA APP CON ★	CLNC DEL	UNICOM
128.325	125.5 323.1	134.25 339.8	122.8 (CTAF) L

MISSED APCH FIX




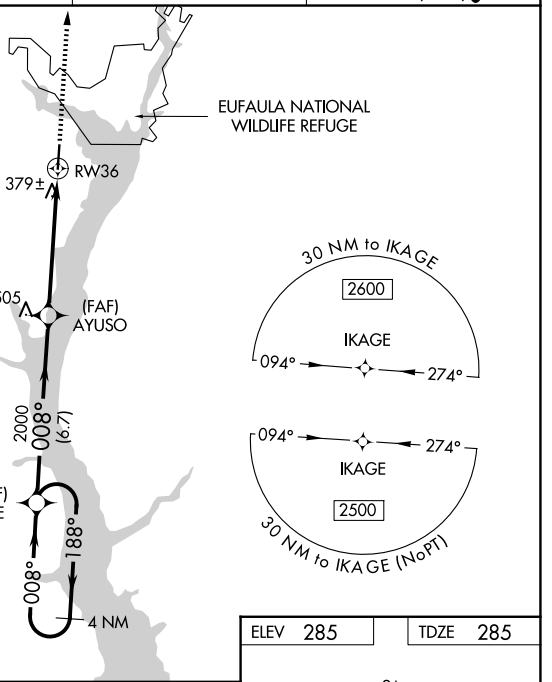

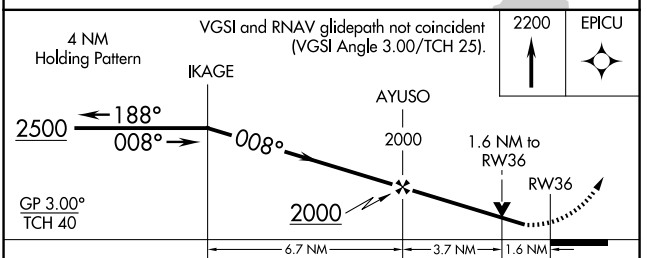

CATEGORY	A	B	C	D
LPV DA	600-1 315 (400-1)			
LNAV/VNAV DA	749-1⅜ 464 (500-1⅜)			
LNAV MDA	800-1 515 (600-1)		800-1⅜ 515 (600-1⅜)	
CIRCLING	920-1 635 (700-1)		1060-2¼ 775 (800-2¼)	1060-2½ 775 (800-2½)

ELEV 285 TDZE 285

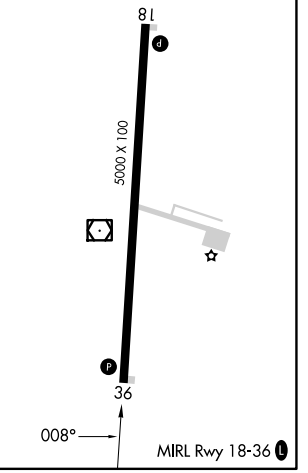

SE-4, 26 NOV 2026 to 24 DEC 2026
SE-4, 26 NOV 2026 to 24 DEC 2026