RNAV (GPS) RWY 17

TRENT LOTT INTL (PQL)

WAAS CH 58204 W17A	APP CRS 168°	Rwy Ldg 6501 TDZE 17 Apt Elev 17


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. When local altimeter setting not received, use Mobile Rgnl altimeter setting; increase LPV DA to 292 feet and LNAV/VNAV DA to 357 feet; increase LNAV/VNAV all visibilities ⅛ SM. Increase all MDA 80 feet and LNAV Cat C/D visibility ¼ SM and Circling Cat C/D visibility ½ SM. Baro-VNAV and VDP NA with Mobile Rgnl altimeter setting. For inop ALS when using Mobile Rgnl altimeter setting increase LPV all Cats visibility to ⅞ SM.

MALSR


MISSED APPROACH: Climb to 800 then climbing left turn to 1800 direct BEZJU and hold.

ATIS	MOBILE APP CON★	TRENT LOTT TOWER★	GND CON	UNICOM
135.175	121.0 307.1	118.575 (CTAF) L	121.725	122.8

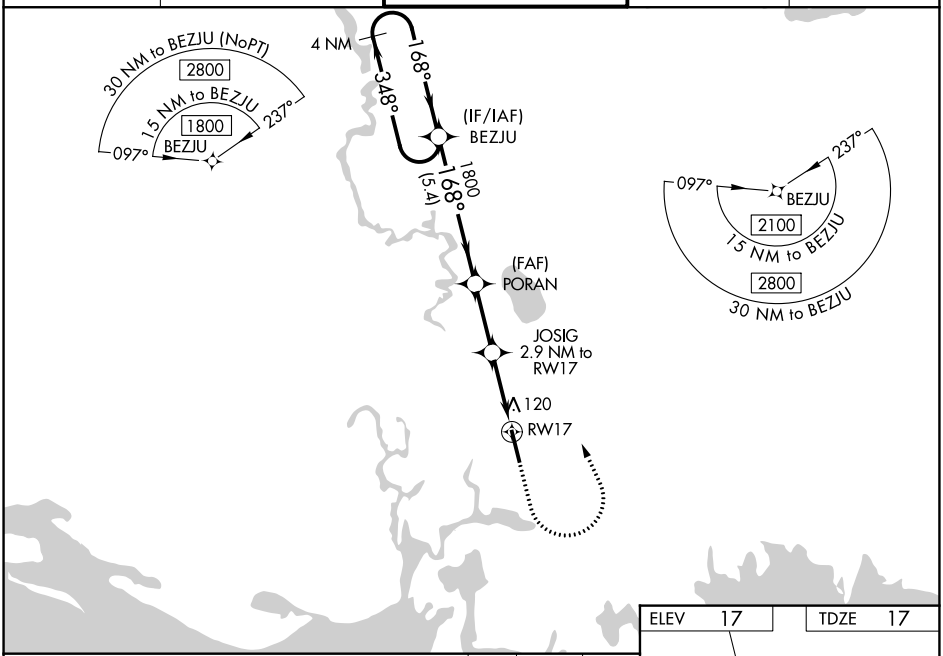

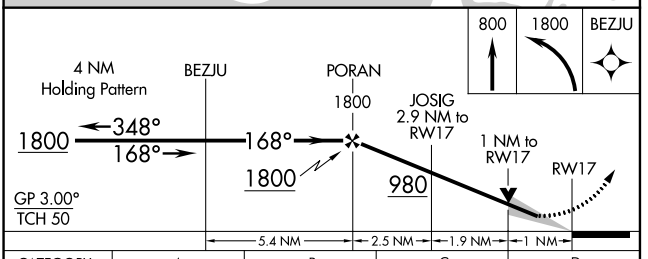

CATEGORY	A	B	C	D
LPV DA	217-½ 200 (200-½)			
LNAV/VNAV DA	282-½ 265 (300-½)			
LNAV MDA	380-½ 363 (400-½)		380-⅝ 363 (400-⅝)	
CIRCLING	480-1 463 (500-1)	680-1 663 (700-1)	680-1¾ 663 (700-1¾)	680-2 663 (700-2)

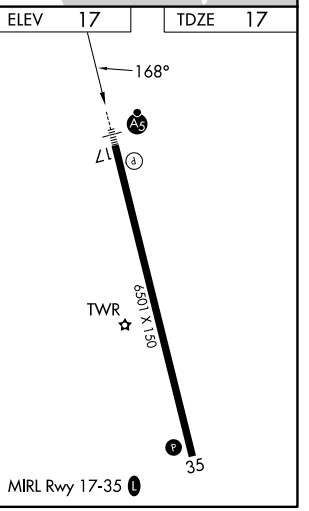

SC-4, 26 NOV 2026 to 24 DEC 2026
SC-4, 26 NOV 2026 to 24 DEC 2026