RNAV (GPS) RWY 35

MC GREGOR EXEC (PWG)


WAAS	APP CRS	Rwy Ldg	5501
CH 87130	353°	TDZE	580
W35A		Apt Elev	592

RNP APCH - GPS.


V A ASR Rwy 35 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Baro-VNAV and VDP NA when using ACT altimeter setting. Circling Rwy 4/22 NA at night. When local altimeter setting not received, use ATC altimeter setting and increase all DA to 861 feet and all visibilities ⅛ SM; increase all MDAs 40 feet and LNAV visibility Cat C ⅛ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 2500 direct BLDEE and on track 018° to ACT VORTAC and hold.


AWOS-3PT	WACO APP CON★	UNICOM
135.525	127.65 352.0	123.05 (CTAF) L

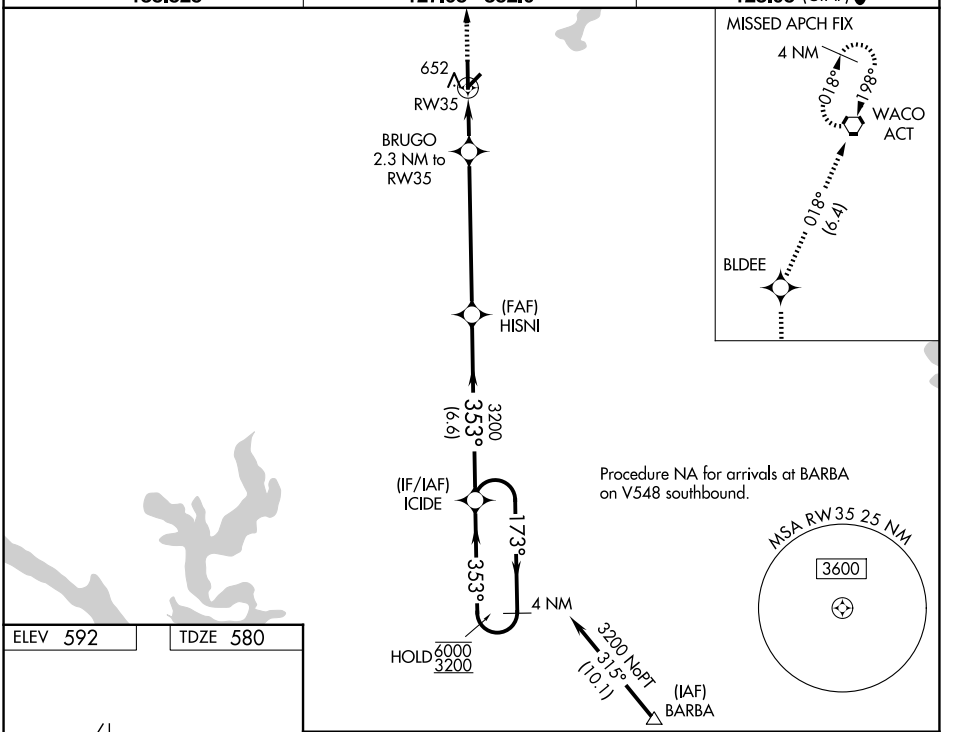

ELEV 592	TDZE 580



MIRL Rwy 17-35 L
REIL Rwy 17 L

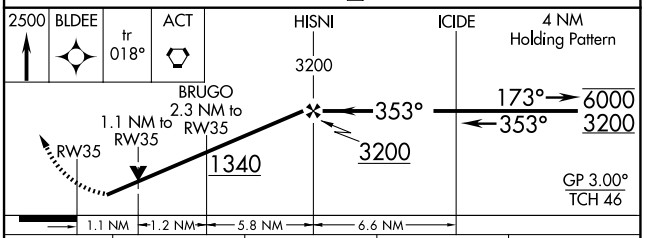

CATEGORY	A	B	C	D
LPV DA	830-¾	250 (300-¾)		NA
LNAV/VNAV DA	830-¾	250 (300-¾)		NA
LNAV MDA	960-1	380 (400-1)		NA
CIRCLING	1020-1 428 (500-1)	1060-1 468 (500-1)	1300-2 708 (800-2)	NA

SC-3, 26 NOV 2026 to 24 DEC 2026
SC-3, 26 NOV 2026 to 24 DEC 2026