ILS or LOC RWY 33

LAWRENCE RGNL (LWC)

LOC I-JZM	APP CRS	Rwy Ldg	5701
108.9	329°	TDZE	831
		Apt Elev	833


ADF required.

T NA When local altimeter setting not received, use TOP altimeter setting and increase DA to 1083 feet; increase all MDAs 60 feet and S-LOC 33 and Circling visibility Cat C ¼ SM.

MALSR

MISSED APPROACH: Climb to 2000 then climbing right turn to 3100 direct NEWBN LOM and hold.


ASOS	KANSAS CITY CENTER	UNICOM
121.225	123.8 343.7	123.0 (CTAF) L

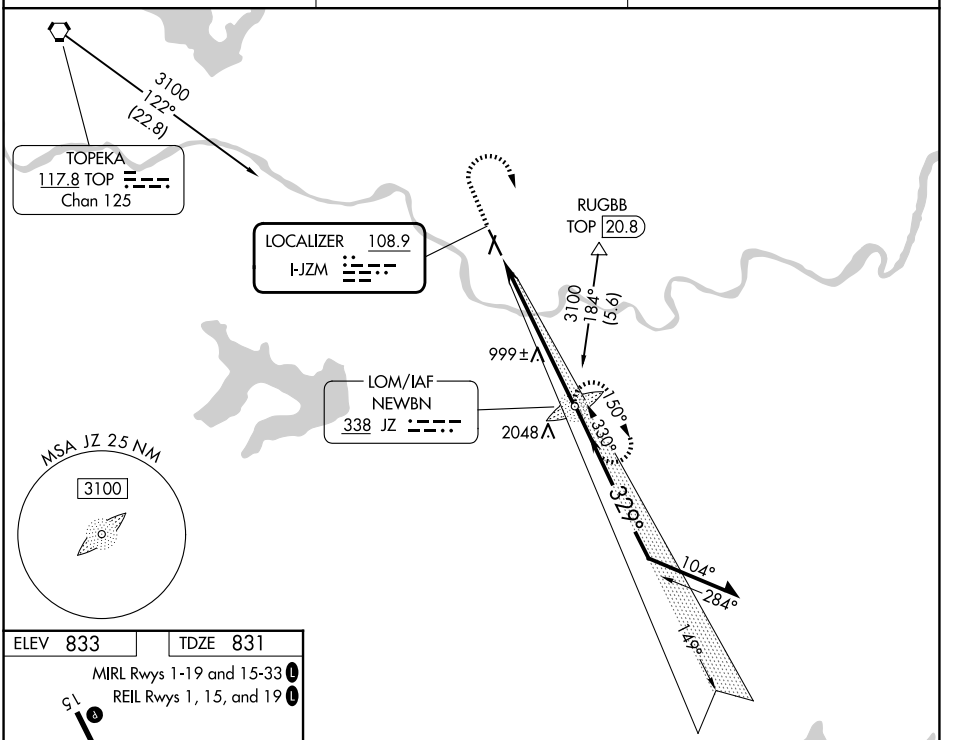


ELEV 833 TDZE 831

MIRL Rwys 1-19 and 15-33 L

REIL Rwys 1, 15, and 19 L

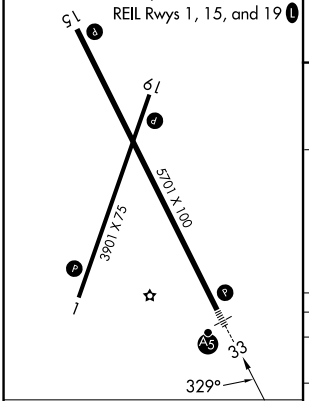

FAF to MAP 6.1 NM					
Knots	60	90	120	150	180
Min:Sec	6:06	4:04	3:03	2:26	2:02

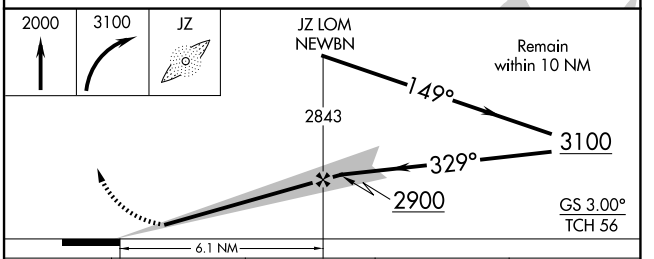

CATEGORY	A	B	C	D
S-ILS 33	1031-½ 200 (200-½)			NA
S-LOC 33	1260-½ 429 (500-½)		1260-¾ 429 (500-¾)	NA
CIRCLING	1420-1 587 (600-1)	1480-1 647 (700-1)	1620-2¼ 787 (800-2¼)	NA

NC-2, 26 NOV 2026 to 24 DEC 2026
NC-2, 26 NOV 2026 to 24 DEC 2026