ILS or LOC RWY 28

GENESEE COUNTY (GVQ)

LOC I-GVQ	APP CRS	Rwy Ldg	5499
108.9	282°	TDZE	911
		Apt Elev	914


T When local altimeter setting not received, use ROC altimeter setting: increase S-ILS 28 DA to 1213 feet; increase all MDAs 120 feet and S-LOC 28 visibility Cat C ⅜ SM, S-LOC 28 visibility CAT D ¼ SM, and Circling visibility Cats C/D ½ SM. Autopilot coupled approach NA below 1433. For inop ALS, increase S-LOC 28 CATs C/D visibility to 1 SM.


A

MALSR


MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 via heading 130° and I-GVQ east course to POCZI INT and hold.

AWOS-3PT	ROCHESTER APP CON	CLNC DEL	UNICOM
127.525	123.7 322.3	121.8	122.7 (CTAF) L

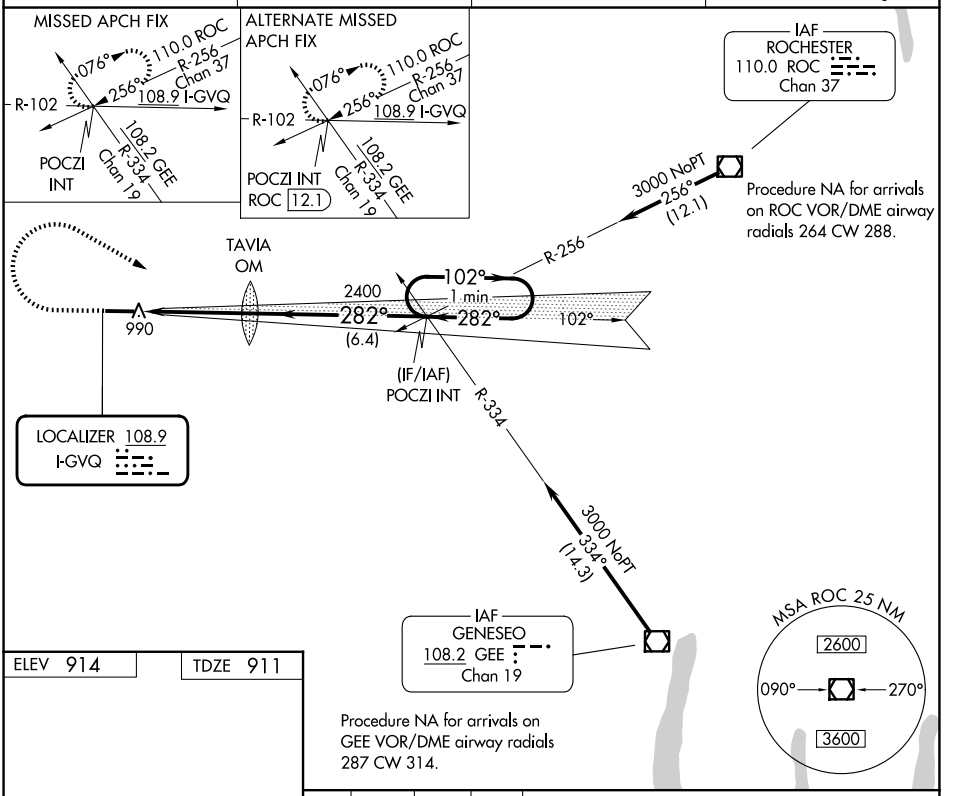



REIL Rwy 10 L
HIRL Rwy 10-28 L

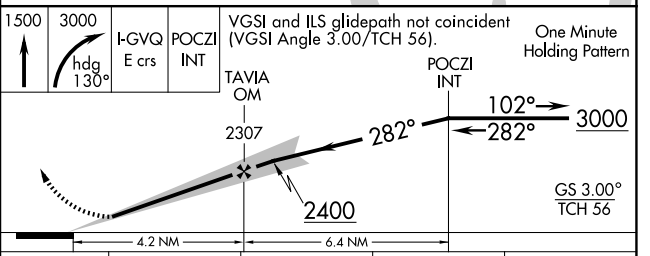

FAF to MAP 4.2 NM					
Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

CATEGORY	A	B	C	D
S-ILS 28	1111-½ 200 (200-½)			
S-LOC 28	1260-½ 349 (400-½)		1260-⅝ 349 (400-⅝)	1260-¾ 349 (400-¾)
CIRCLING	1380-1 466 (500-1)		1720-2¼ 806 (900-2¼)	1720-2½ 806 (900-2½)

NE-2, 26 NOV 2026 to 24 DEC 2026
NE-2, 26 NOV 2026 to 24 DEC 2026