RNAV (GPS) RWY 24

MUSCATINE MUNI (MUT)

WAAS CH 99701 W24A	APP CRS 240°	Rwy Ldg 5500 TDZE 545 Apt Elev 547


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LPV all Cats visibility to 1 SM, LNAV/VNAV all Cats visibility to 1⅛ SM, and LNAV Cats C/D visibility to 1⅛ SM. When local altimeter setting not received, use IOW altimeter setting and increase LPV DA to 883 feet; increase LNAV/VNAV DA to 1024 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using IOW altimeter setting.

MALSR


MISSED APPROACH: Climb to 3000 direct IZBUF and hold.

AWOS-3P	QUAD CITY APP CON ★	CLNC DEL	UNICOM
120.625	133.275 257.8	119.125	122.7 (CTAF) L

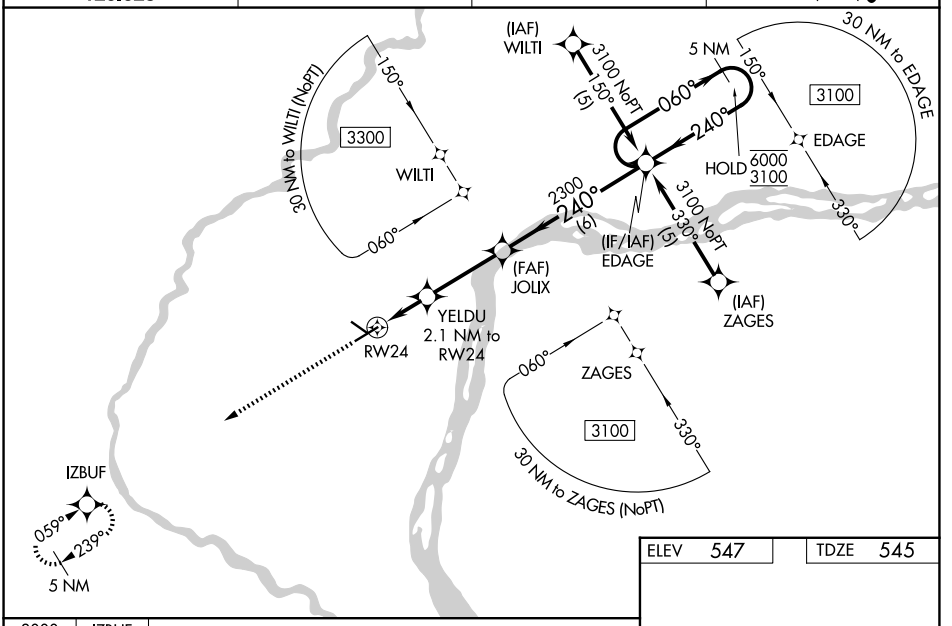

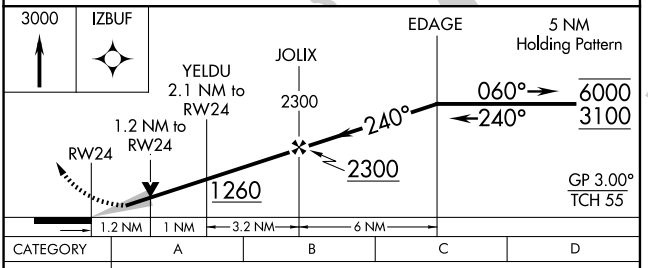

CATEGORY	A	B	C	D
LPV DA	812-½ 267 (300-½)			
LNAV/VNAV DA	953-¾ 408 (500-¾)			
LNAV MDA	960-½ 415 (500-½)		960-¾ 415 (500-¾)	
CIRCLING	1080-1 533 (600-1)	1200-1 653 (700-1)	1200-1¾ 653 (700-1¾)	1500-3 953 (1000-3)

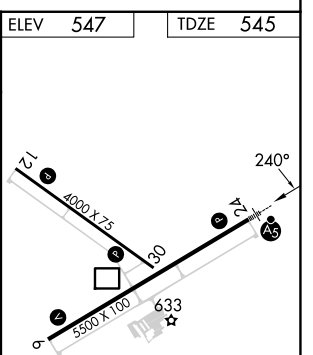

REIL Rwys 6, 12, and 30 L

MIRL Rwys 6-24 and 12-30 L

NC-3, 26 NOV 2026 to 24 DEC 2026
NC-3, 26 NOV 2026 to 24 DEC 2026